



Flood Luminaire Photometric Data

Description Information

Luminary Name: BIANCO150W		Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:		Lamp Catalog:	Test Date: 2022/04/01
Manufacture: BBT LIGHTING		Shld. Ang(°):	Test Machine: GON-2000
Test Lab:		Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size(W*L*H): 0.000m*0.000m*0.000m		Lum. Area(m2): 0.000	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=2.0	Temp.(°C): 25	Humidity(%): 60.0

Character Parameter



Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 1000.000	Luminary Flux(lm): 15396.904	Beam Lumens(lm): 12107.84
Rated Power(W):	Luminary Efficiency: 1539.69%	Beam Efficiency(%): 78.64
Rated Voltage(V):	Luminary EER(lm/W): 107.146	Field Lumens(lm): 15114.76
Tested Power(W): 143.700	Max. Candela(cd): 6446.510	Field Efficiency(%): 98.17
Lamps' Inside: 1	Max Cand@Ang. (°): B=0.0 β=-2.0	ErP φuse(120°): 13989.317lm
Tested Electrics(V, A, pf): 230.7, 0.634, 0.982	Beam Angle(50%)(V, H): 102.3(°), 105.4(°)	IRF(%): 111.050
Lamp Size(W*L*H): 0.000m*0.000m*0.000m	Field Angle(10%)(V, H): 137.8(°), 138.4(°)	

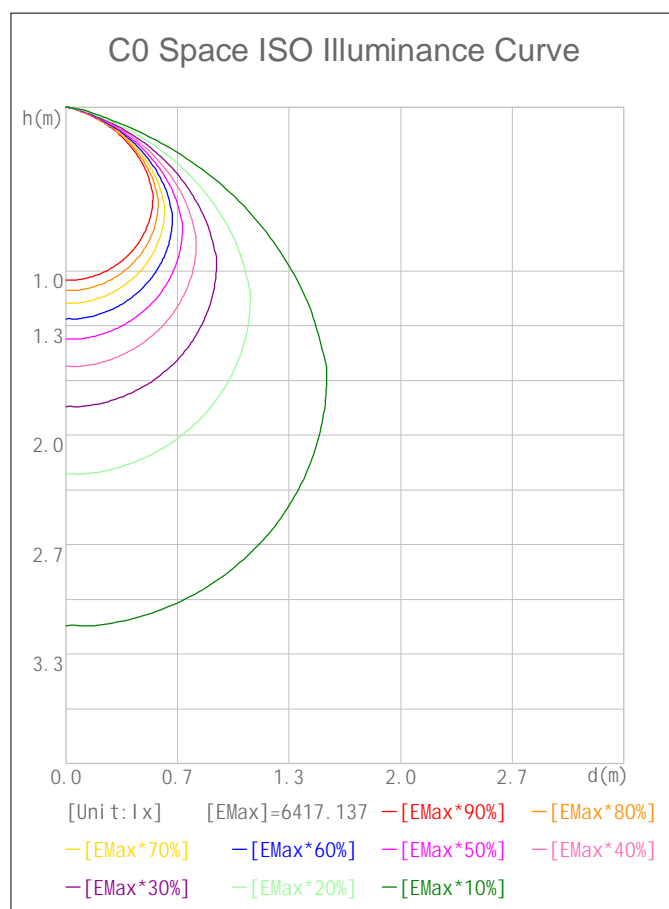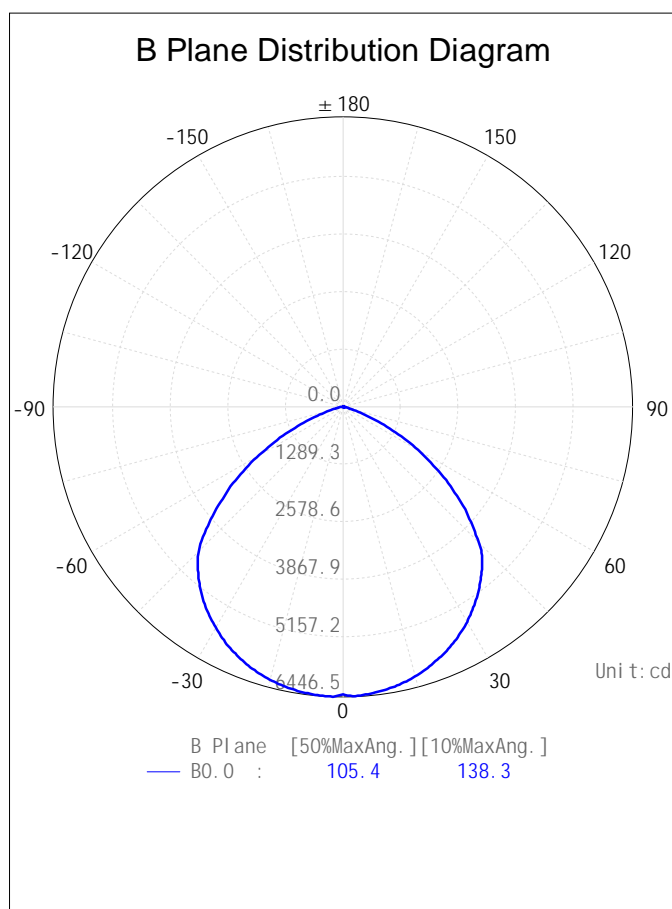

2D Plane Light Intensity Distribution Curve

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

B Plane Distribution Diagram

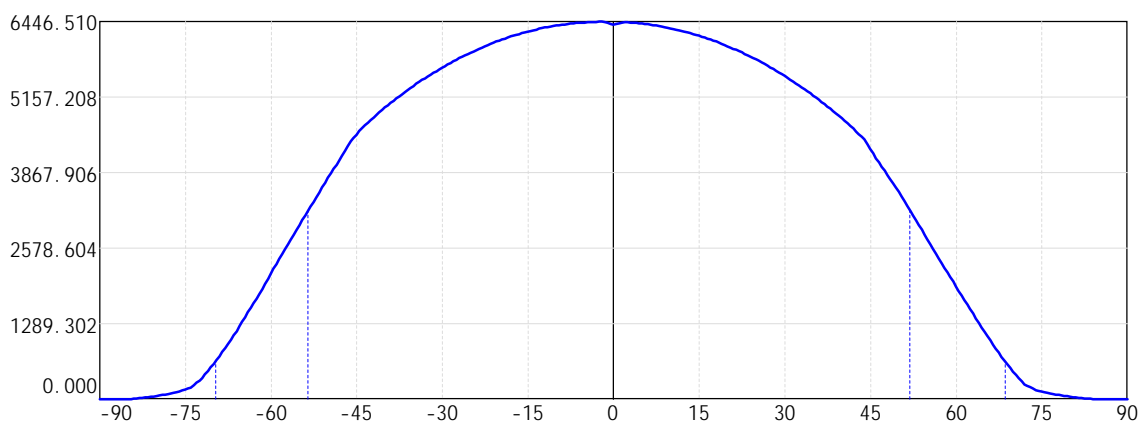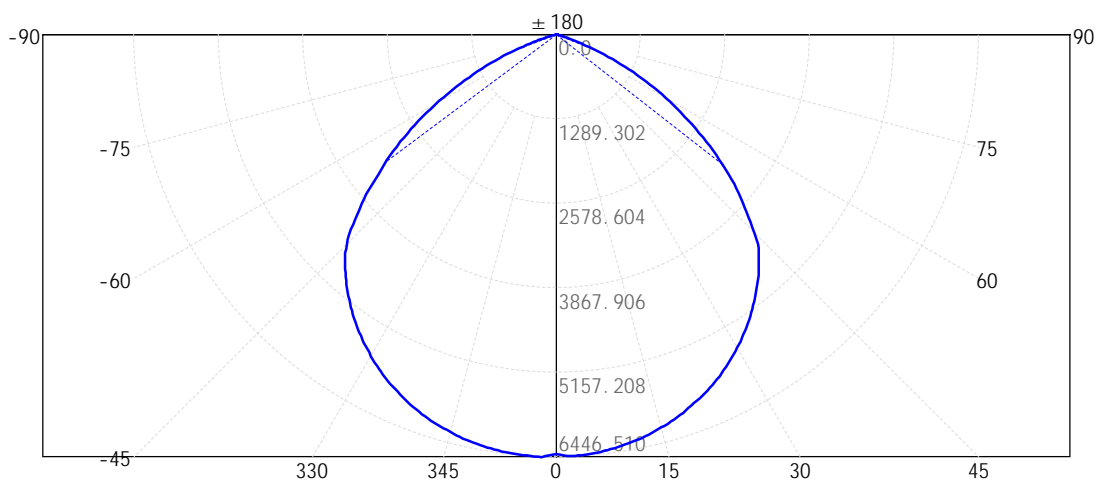

B Plane
 B0.0 :


[50%MaxAng.]
 105.4

[10%MaxAng.] t:cd
 138.3

3D Light Intensity Distribution Modal

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

3D Light Intensity Distribution Modal

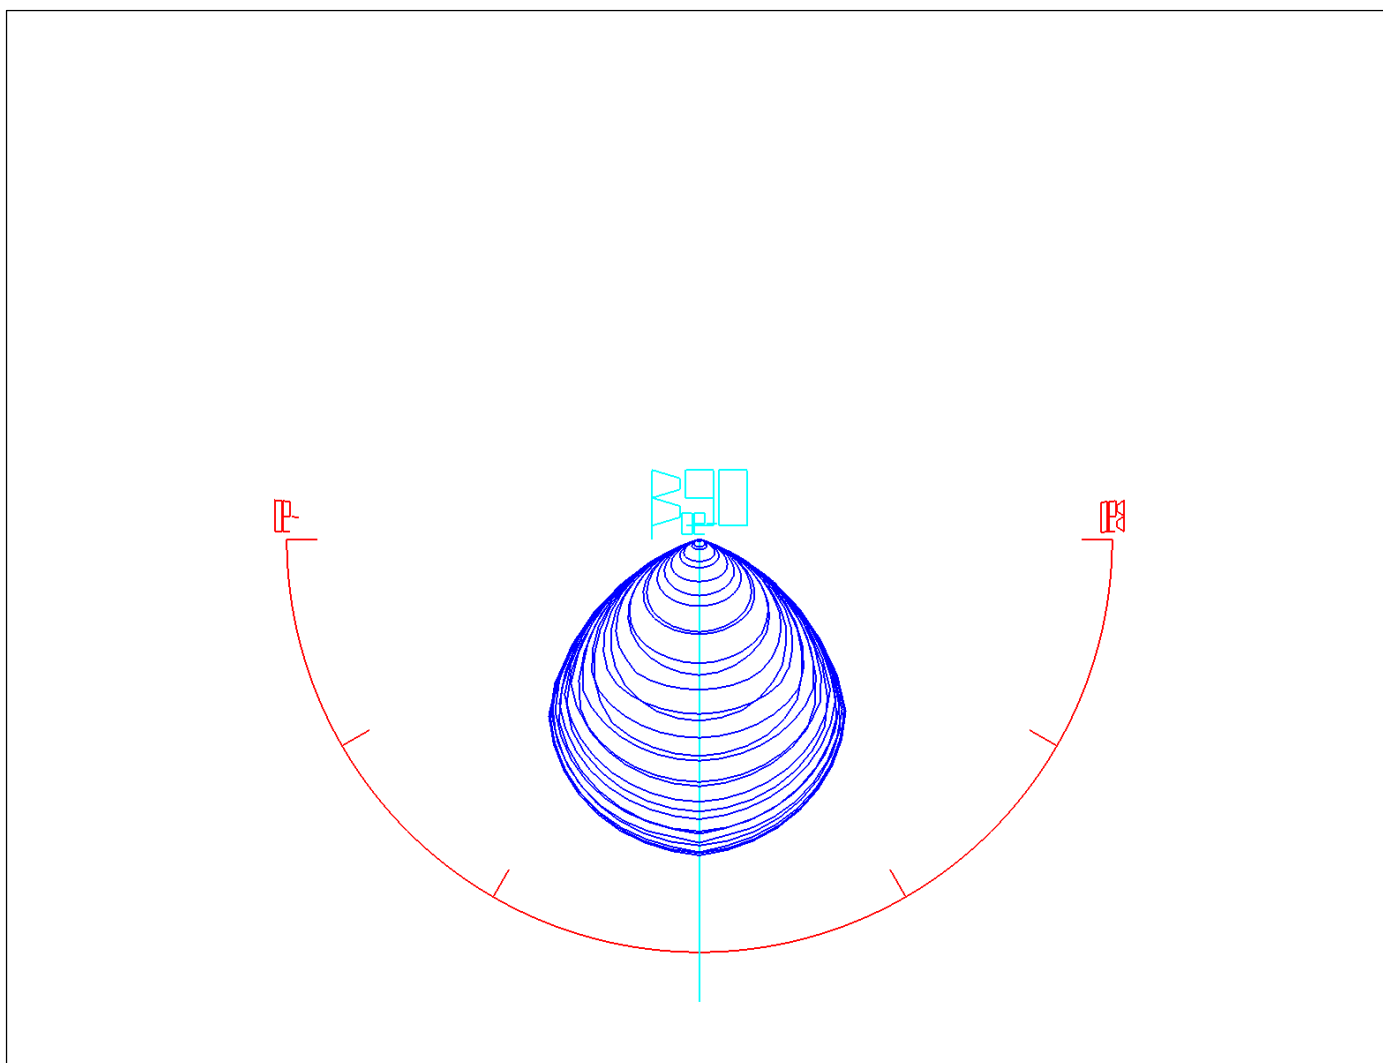

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Flood Report
Photometric Filename:BBT 150W.IES

Zone Lumens Tabulation - (Cont.)

	β 30.0	β 35.0	β 40.0	β 45.0	β 50.0	β 55.0	β 60.0	β 65.0	β 70.0	β 75.0	β 80.0	β 85.0	β 90.0
B-30.0	30.00	25.53	20.51	15.56	10.95	6.94	3.69	1.39	0.36	0.11	0.01	0.00	
B-25.0	31.48	27.42	22.24	17.05	12.09	7.77	4.24	1.69	0.42	0.12	0.01	0.00	
B-20.0	32.63	28.57	23.69	18.25	13.04	8.45	4.70	1.95	0.48	0.13	0.02	0.00	
B-15.0	33.49	29.36	24.71	19.14	13.77	8.98	5.06	2.15	0.54	0.13	0.02	0.00	
B-10.0	34.06	29.88	25.32	19.73	14.27	9.33	5.30	2.29	0.58	0.14	0.02	0.00	
B-5.0	34.34	30.13	25.59	20.03	14.52	9.51	5.43	2.35	0.60	0.14	0.02	0.00	
B0.0	34.30	30.10	25.55	20.00	14.50	9.50	5.42	2.35	0.60	0.14	0.02	0.00	
B5.0	33.94	29.78	25.19	19.64	14.21	9.29	5.29	2.28	0.58	0.14	0.02	0.00	
B10.0	33.29	29.20	24.49	18.99	13.68	8.91	5.04	2.14	0.53	0.13	0.02	0.00	
B15.0	32.36	28.31	23.39	18.04	12.92	8.37	4.67	1.93	0.48	0.13	0.02	0.00	
B20.0	31.13	26.97	21.90	16.81	11.94	7.69	4.20	1.68	0.42	0.12	0.01	0.00	
B25.0	29.47	24.98	20.12	15.30	10.75	6.86	3.63	1.38	0.36	0.10	0.01	0.00	
B30.0	26.94	22.53	18.01	13.58	9.44	5.90	3.01	1.06	0.30	0.09	0.01	0.00	
B35.0	23.79	19.77	15.68	11.61	8.02	4.82	2.35	0.77	0.26	0.08	0.01	0.00	
B40.0	20.32	16.77	13.05	9.62	6.44	3.71	1.67	0.55	0.21	0.06	0.01	0.00	
B45.0	16.65	13.46	10.44	7.50	4.79	2.61	1.05	0.41	0.17	0.05	0.00	0.00	
B50.0	12.77	10.30	7.73	5.30	3.23	1.57	0.65	0.31	0.13	0.03	0.00	0.00	
B55.0	9.05	6.99	5.04	3.27	1.77	0.84	0.44	0.23	0.09	0.02	0.00	0.00	
B60.0	5.39	3.99	2.64	1.54	0.87	0.52	0.30	0.15	0.05	0.01	0.00	0.00	
B65.0	2.33	1.61	1.08	0.74	0.51	0.33	0.19	0.09	0.03	0.00	0.00	0.00	
B70.0	0.92	0.73	0.57	0.42	0.29	0.18	0.09	0.04	0.01	0.00	0.00	0.00	
B75.0	0.44	0.35	0.26	0.18	0.12	0.06	0.03	0.01	0.00	0.00	0.00	0.00	
B80.0	0.12	0.09	0.06	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
B85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
B90.0													
Total	181.00	191.15	200.54	209.12	216.85	223.63	229.45	234.27	238.04	240.73	242.31	242.73	

	β 90.0	Total
B-90.0		0.00
B-85.0		0.06
B-80.0		0.48
B-75.0		1.37
B-70.0		2.47
B-65.0		3.75
B-60.0		5.49
B-55.0		9.35
B-50.0		15.98
B-45.0		24.51
B-40.0		34.20
B-35.0		44.74
B-30.0		56.27
B-25.0		68.37
B-20.0		80.13
B-15.0		92.40
B-10.0		104.36
B-5.0		116.18
B0.0		

IES Flood Report

Photometric Filename:BBT 150W.IES


Zone Lumens Tabulation - (Cont.)

β 90.0	Total
B0.0	128.10
B5.0	138.74
B10.0	147.90
B15.0	156.14
B20.0	163.63
B25.0	170.45
B30.0	176.64
B35.0	182.25
B40.0	187.28
B45.0	191.75
B50.0	195.71
B55.0	199.16
B60.0	202.11
B65.0	204.61
B70.0	206.66
B75.0	208.29
B80.0	209.52
B85.0	210.44
B90.0	210.44
Total	15396.90

Rectangle ISO Lighting Intensity Diagram

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

ISO Lighting Intensity Curve

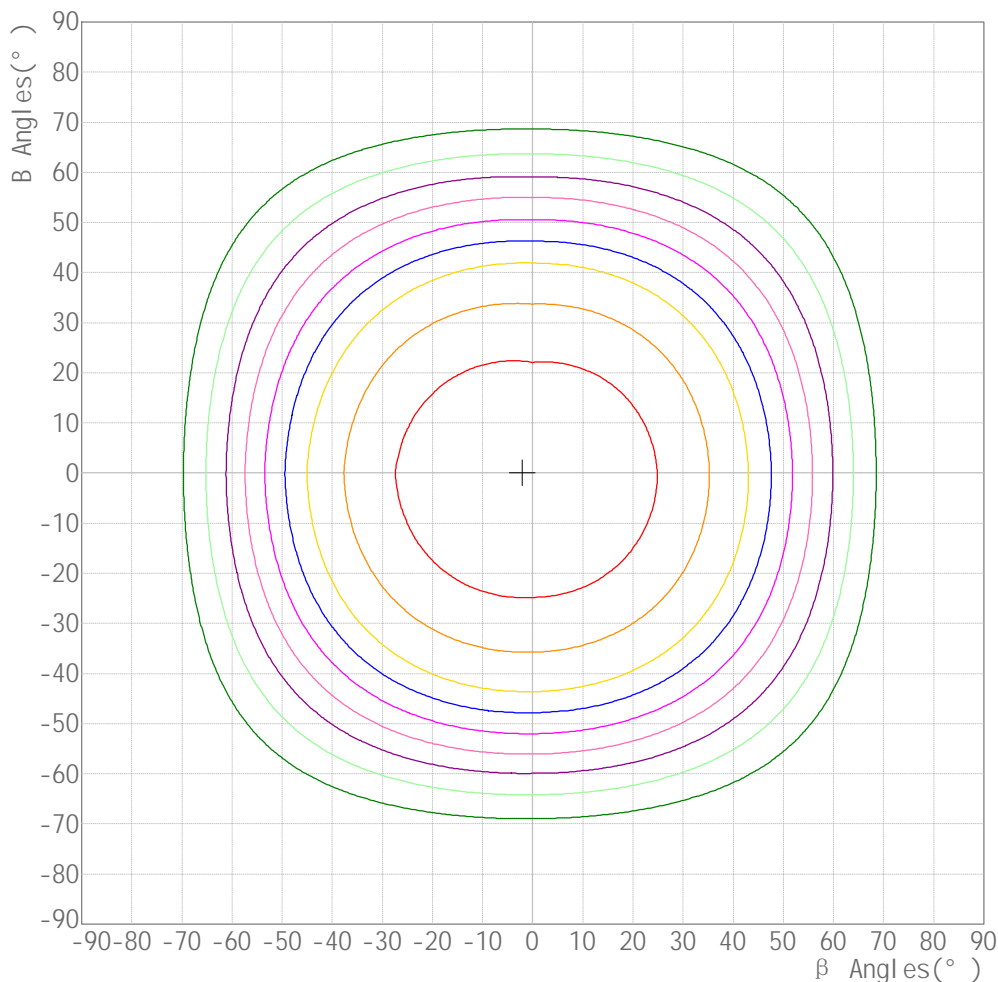


- Curves:
[Unit: cd]
[IMax] =6446.510
- [IMax*90%]=5801.859
 - [IMax*80%]=5157.208
 - [IMax*70%]=4512.557
 - [IMax*60%]=3867.906
 - [IMax*50%]=3223.255
 - [IMax*40%]=2578.604
 - [IMax*30%]=1933.953
 - [IMax*20%]=1289.302
 - [IMax*10%]=644.651

Maximum Light Intensity(cd): 6446.51
Maximum Cand. @Angle: H=-2.0°,V=0.0°

Plane ISO-Illuminance Diagram

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

Plane ISO-Illuminance Curve

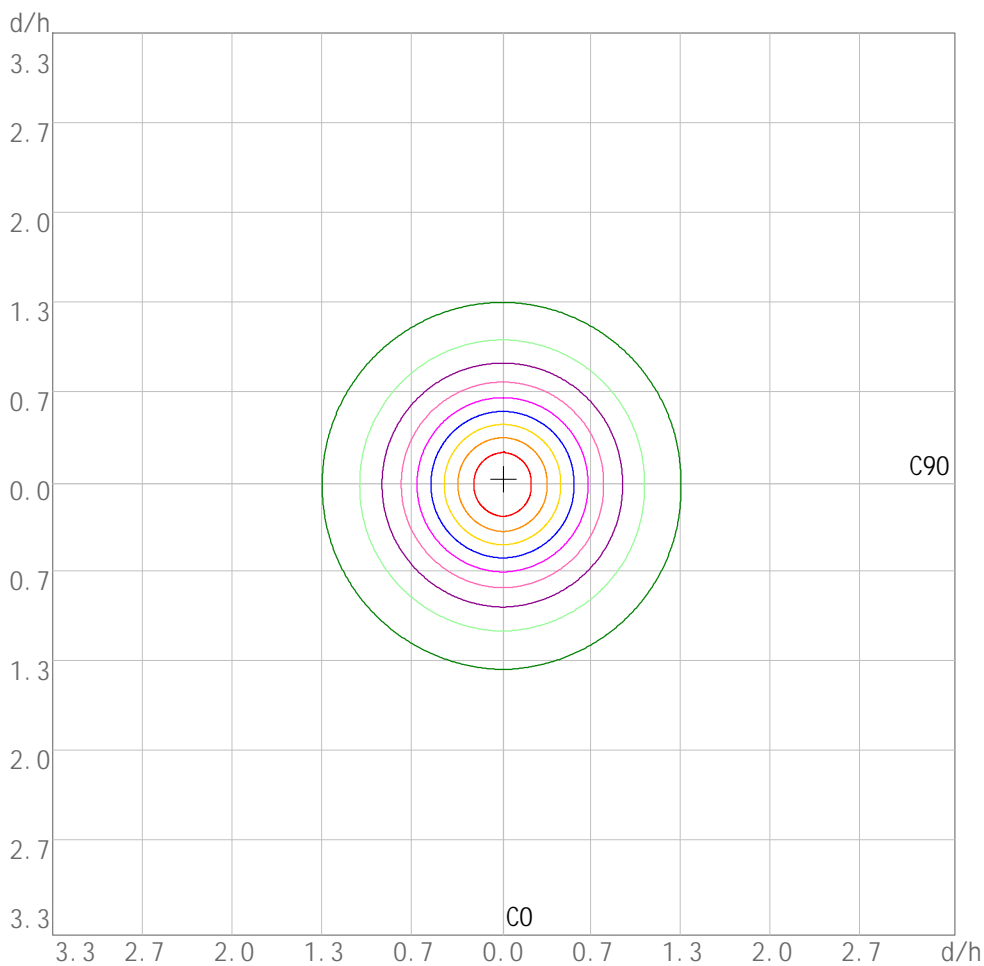


- Curves:
unit:lx
[EMax] =714.971
— [EMax*90%]=643.474
— [EMax*80%]=571.977
— [EMax*70%]=500.479
— [EMax*60%]=428.982
— [EMax*50%]=357.485
— [EMax*40%]=285.988
— [EMax*30%]=214.491
— [EMax*20%]=142.994
— [EMax*10%]=71.497

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 714.97
Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0

3D Plane ISO Illuminance Diagram

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

3D Plane Illuminance Modal

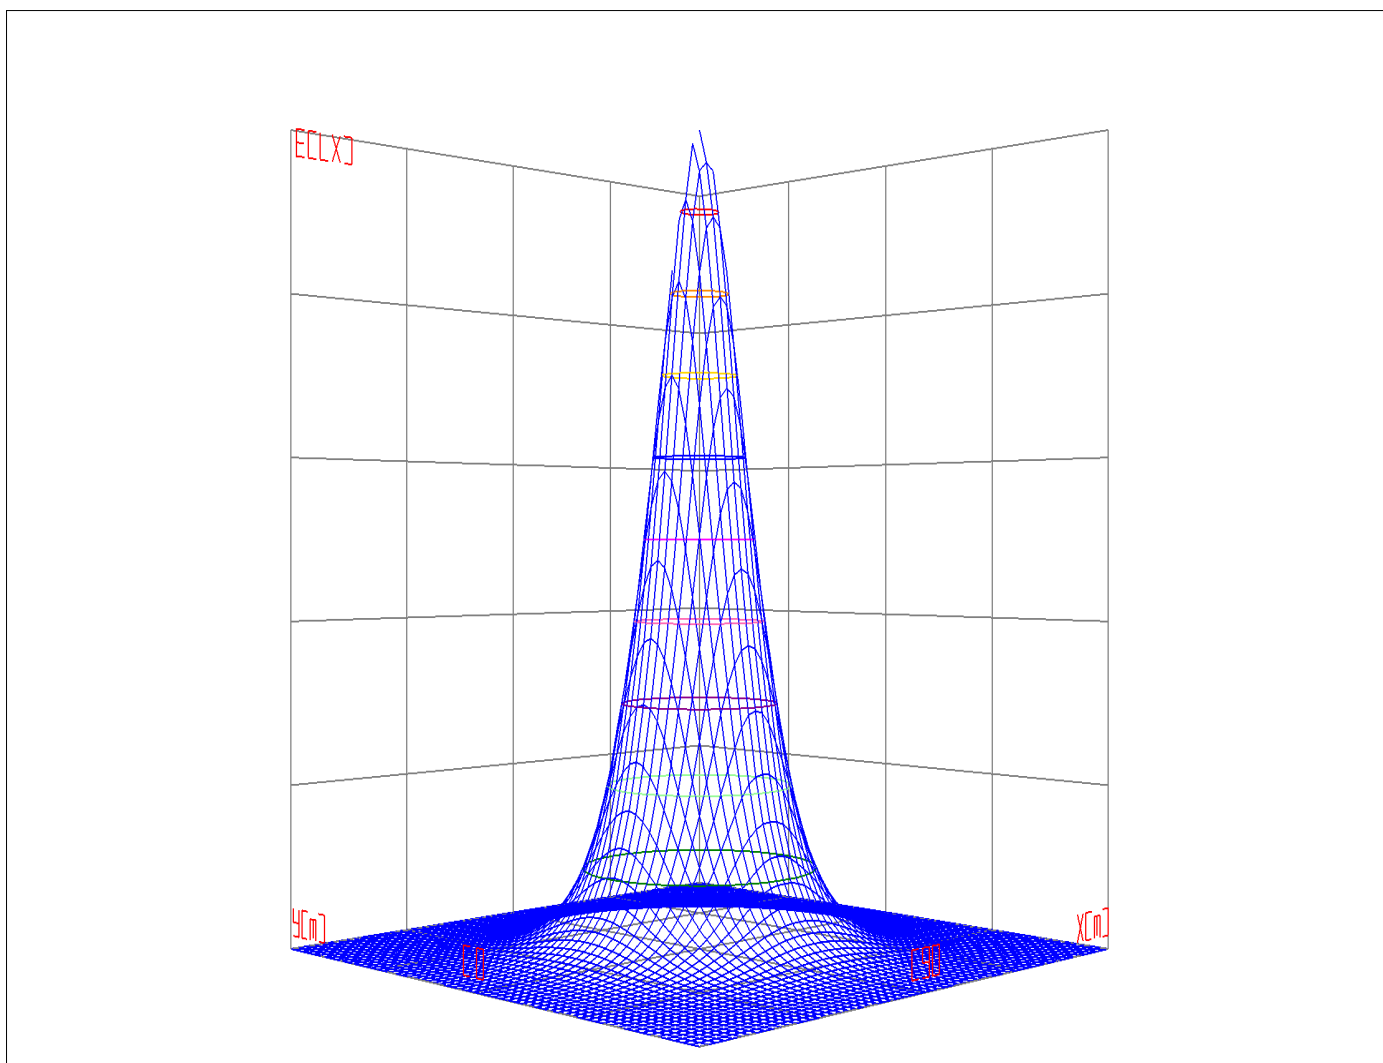

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

Space ISO Illuminance Curve




- Curves:
 [Unit: lx]
 [EMax] =6417.137
- [EMax*90%]=5775.423
 - [EMax*80%]=5133.709
 - [EMax*70%]=4491.996
 - [EMax*60%]=3850.282
 - [EMax*50%]=3208.568
 - [EMax*40%]=2566.855
 - [EMax*30%]=1925.141
 - [EMax*20%]=1283.427
 - [EMax*10%]=641.714

Space Plane Maximum Illuminance and @Angle:6417.14lx,2.5deg
 Plane Maximum Lighting Intensity and @Angle:6435.495cd,0deg

Illuminance-Distance Diagram

Lum. Name: BIANCO150W	Lum. Catalog:	Test ID: BIANCO150W
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: BBT LIGHTING	Test Machine: GON-2000	Test Date: 2022/04/01

Illuminance-Distance Curve

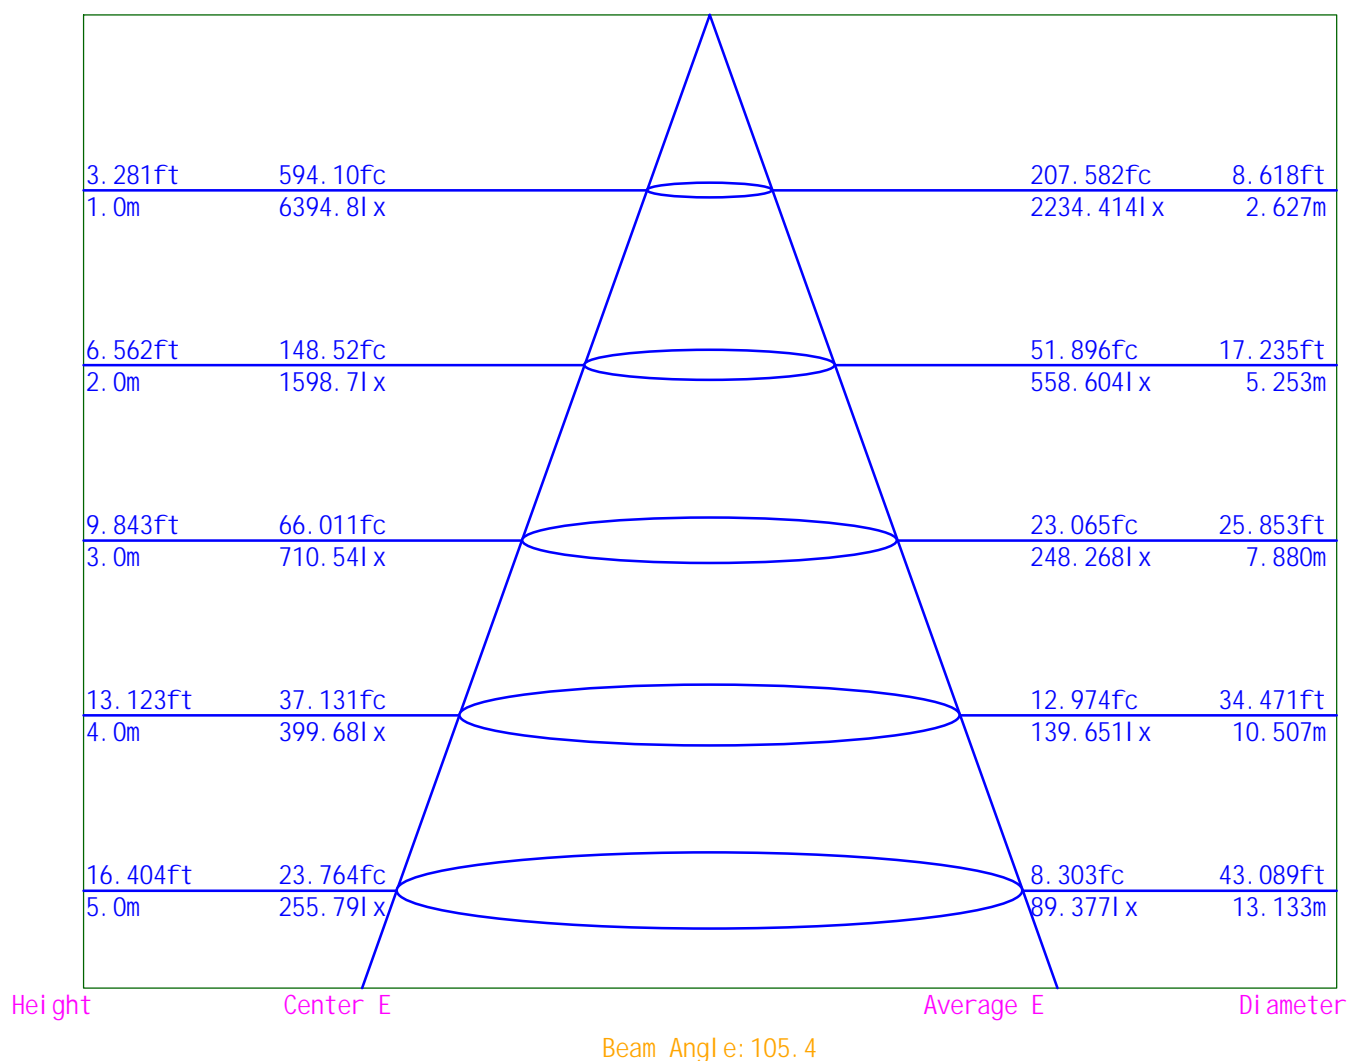

IES Flood Report
Photometric Filename:BBT 150W.IES

Candela Tabulation

V/H	β -90.0	β -85.0	β -80.0	β -75.0	β -70.0	β -65.0	β -60.0	β -55.0	β -50.0	β -45.0	β -40.0	β -35.0
B-90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B-85.0	0.00	0.00	0.00	0.00	0.00	0.04	0.20	0.41	0.66	0.94	1.24	2.07
B-80.0	0.00	0.00	0.00	0.12	0.38	1.59	5.43	9.50	16.62	25.41	33.76	41.86
B-75.0	0.00	0.00	0.08	0.36	4.99	12.75	27.22	42.63	58.52	74.21	89.19	103.53
B-70.0	0.00	0.00	0.18	4.53	16.99	37.19	60.10	84.13	109.89	136.00	167.77	207.19
B-65.0	0.00	0.01	0.99	11.17	36.05	65.68	98.00	136.23	184.79	291.68	438.88	598.15
B-60.0	0.00	0.03	3.71	24.15	57.72	96.99	149.02	242.79	429.33	662.54	894.86	1135.29
B-55.0	0.00	0.05	6.25	38.01	80.77	135.55	244.85	488.29	784.62	1111.37	1415.25	1701.66
B-50.0	0.00	0.06	11.71	52.61	106.55	187.82	437.31	791.39	1188.96	1573.89	1960.57	2334.61
B-45.0	0.00	0.07	18.77	67.22	134.19	303.74	678.55	1124.89	1586.09	2060.10	2519.91	2907.31
B-40.0	0.00	0.08	25.19	81.37	171.12	459.04	923.69	1450.05	1990.81	2536.21	3010.01	3474.64
B-35.0	0.00	0.38	31.51	95.51	218.07	626.19	1171.23	1753.40	2383.16	2952.13	3496.58	4001.68
B-30.0	0.00	1.12	38.04	110.92	295.09	786.00	1401.72	2059.04	2725.42	3343.20	3931.60	4450.95
B-25.0	0.00	1.74	43.63	124.26	364.56	934.09	1603.23	2326.97	3019.27	3683.75	4296.49	4758.16
B-20.0	0.00	2.24	48.23	136.16	448.31	1065.31	1773.48	2548.96	3272.07	3975.20	4601.54	4962.89
B-15.0	0.00	2.62	51.80	149.04	514.68	1170.39	1926.33	2723.29	3475.82	4205.64	4760.74	5123.40
B-10.0	0.00	2.89	54.32	158.43	562.98	1252.08	2039.47	2853.18	3634.34	4380.03	4874.30	5239.95
B-5.0	0.00	3.03	55.76	164.19	592.69	1303.15	2110.93	2937.17	3738.50	4476.54	4946.89	5314.88
B0.0	0.00	3.05	56.12	166.18	603.48	1322.50	2139.29	2972.02	3783.50	4516.47	4977.64	5347.33
B5.0	0.00	3.03	55.72	164.10	591.28	1300.34	2107.11	2930.68	3730.38	4462.68	4936.33	5303.23
B10.0	0.00	2.88	54.24	158.27	560.33	1246.21	2032.40	2838.27	3614.78	4360.58	4852.72	5216.82
B15.0	0.00	2.62	51.68	148.78	511.15	1161.01	1917.14	2698.70	3438.51	4168.39	4722.09	5089.10
B20.0	0.00	2.23	48.07	135.80	444.41	1055.36	1763.75	2517.08	3233.58	3915.47	4507.17	4917.38
B25.0	0.00	1.71	43.44	123.83	360.92	926.47	1590.41	2293.76	2992.82	3639.95	4247.57	4695.79
B30.0	0.00	1.07	37.84	110.45	292.31	779.02	1384.60	2033.86	2670.83	3261.58	3836.26	4334.12
B35.0	0.00	0.31	31.29	95.02	216.90	614.97	1146.54	1734.33	2325.63	2907.21	3404.79	3870.30
B40.0	0.00	0.01	25.03	80.85	170.34	449.39	909.78	1425.98	1955.82	2458.57	2966.52	3360.94
B45.0	0.00	0.01	18.70	66.67	133.19	298.32	663.70	1089.38	1557.58	2012.20	2424.73	2839.13
B50.0	0.00	0.01	11.78	52.07	105.62	186.76	424.17	777.21	1146.26	1539.09	1908.23	2228.11
B55.0	0.00	0.00	6.37	37.52	79.89	134.09	240.56	469.19	767.28	1058.37	1371.24	1658.55
B60.0	0.00	0.00	3.68	23.89	56.86	95.76	147.28	237.50	409.50	635.19	863.48	1066.50
B65.0	0.00	0.00	0.81	11.35	35.35	64.52	96.46	133.97	182.78	279.15	411.58	558.96
B70.0	0.00	0.00	0.01	4.53	17.00	36.29	58.70	82.37	107.61	132.98	164.91	201.89
B75.0	0.00	0.00	0.01	0.03	4.98	13.07	26.64	41.28	56.68	71.95	86.59	100.50
B80.0	0.00	0.00	0.00	0.01	0.03	1.10	5.36	10.00	16.99	25.01	32.48	39.82
B85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.08	0.10	0.82
B90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	β -30.0	β -25.0	β -20.0	β -15.0	β -10.0	β -5.0	β 0.0	β 5.0	β 10.0	β 15.0	β 20.0	β 25.0
B-90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B-85.0	3.74	5.31	6.77	8.05	9.13	9.98	10.54	9.89	8.96	7.82	6.51	5.07
B-80.0	49.68	56.57	62.48	67.37	71.20	73.95	75.60	73.24	69.80	65.28	59.74	53.21
B-75.0	117.65	129.50	139.52	148.98	155.39	158.95	159.84	157.02	151.72	143.88	133.51	122.76
B-70.0	272.50	329.58	407.78	468.54	511.28	535.60	541.27	527.88	496.13	446.54	379.79	296.70
B-65.0	740.01	875.82	1001.87	1099.16	1159.69	1192.44	1198.07	1182.03	1139.34	1069.78	963.99	830.30
B-60.0	1336.97	1517.06	1668.43	1795.45	1882.91	1930.17	1937.18	1916.80	1857.23	1759.50	1625.19	1461.44

IES Flood Report
Photometric Filename:BBT 150W.IES

Candela Tabulation - (Cont.)

V/H	β -30.0	β -25.0	β -20.0	β -15.0	β -10.0	β -5.0	β 0.0	β 5.0	β 10.0	β 15.0	β 20.0	β 25.0
B-55.0	1980.70	2229.31	2432.82	2587.97	2683.57	2726.23	2728.93	2709.93	2651.33	2540.05	2368.76	2153.00
B-50.0	2659.09	2900.96	3145.75	3336.31	3433.49	3480.94	3481.34	3463.74	3399.68	3287.02	3079.29	2816.06
B-45.0	3287.94	3573.57	3862.27	4037.10	4147.21	4252.82	4277.92	4232.92	4103.25	3974.61	3787.16	3485.31
B-40.0	3886.47	4197.16	4538.64	4683.17	4777.17	4828.30	4837.45	4812.47	4745.03	4634.07	4473.03	4082.08
B-35.0	4428.09	4727.86	4913.92	5055.80	5152.56	5204.21	5212.58	5188.13	5120.44	5007.43	4848.74	4643.25
B-30.0	4797.65	5038.21	5229.67	5373.71	5471.86	5525.43	5534.71	5509.66	5439.89	5324.02	5162.63	4954.17
B-25.0	5054.67	5299.81	5493.62	5639.89	5738.82	5790.46	5796.33	5774.88	5706.69	5590.31	5426.30	5211.82
B-20.0	5264.31	5511.84	5710.46	5855.58	5949.24	5995.78	5998.13	5979.18	5917.17	5806.35	5640.31	5423.02
B-15.0	5429.29	5678.99	5877.50	6020.51	6113.92	6153.56	6145.83	6138.79	6080.79	5967.16	5806.93	5585.62
B-10.0	5547.10	5803.08	5999.79	6145.52	6230.75	6265.36	6245.89	6249.81	6198.17	6090.36	5923.95	5704.37
B-5.0	5623.60	5881.90	6081.84	6226.37	6319.37	6348.00	6295.97	6333.49	6282.33	6169.44	5993.30	5776.15
B0.0	5657.55	5916.42	6123.32	6271.39	6376.12	6429.82	6394.84	6411.53	6330.27	6203.34	6019.52	5799.07
B5.0	5610.33	5866.18	6064.98	6207.73	6300.06	6326.29	6266.19	6311.78	6263.02	6150.80	5976.44	5760.43
B10.0	5520.74	5772.09	5965.76	6107.20	6190.50	6218.93	6185.92	6203.38	6157.93	6052.04	5889.92	5673.38
B15.0	5390.59	5634.53	5825.97	5964.32	6049.10	6079.79	6058.28	6065.02	6015.97	5910.97	5755.40	5541.16
B20.0	5213.87	5454.63	5644.44	5780.03	5865.54	5901.06	5888.07	5884.46	5833.46	5730.81	5574.30	5365.81
B25.0	4992.92	5231.06	5415.89	5551.64	5636.64	5674.17	5664.61	5658.59	5604.51	5502.06	5348.57	5143.08
B30.0	4720.82	4958.05	5140.87	5274.63	5360.75	5401.64	5396.46	5385.87	5328.78	5224.94	5073.82	4874.01
B35.0	4280.73	4625.85	4813.22	4945.98	5031.45	5070.72	5065.48	5054.65	4999.33	4897.61	4748.04	4541.24
B40.0	3737.62	4098.26	4281.27	4531.31	4639.34	4681.85	4679.19	4666.02	4607.20	4482.20	4215.66	3983.18
B45.0	3131.94	3465.36	3663.73	3859.34	3997.14	4021.99	4002.97	4002.09	3953.17	3796.86	3588.62	3377.10
B50.0	2531.99	2821.48	2990.51	3120.96	3251.74	3318.87	3319.25	3301.67	3217.93	3071.67	2924.04	2736.58
B55.0	1909.15	2107.72	2276.46	2415.89	2516.15	2570.32	2570.51	2554.01	2483.91	2367.97	2212.40	2031.41
B60.0	1277.10	1459.37	1609.86	1716.66	1785.99	1818.36	1814.93	1805.00	1760.31	1680.72	1566.63	1403.75
B65.0	709.41	832.91	927.07	998.85	1059.56	1090.27	1090.99	1079.86	1039.20	969.47	889.19	787.39
B70.0	256.78	303.09	369.87	419.90	453.10	469.62	469.75	461.90	437.95	397.90	341.88	270.21
B75.0	114.00	125.23	134.72	144.09	150.38	153.74	154.36	151.82	146.70	139.00	128.71	118.49
B80.0	47.26	53.75	59.28	63.79	67.27	69.70	71.08	69.00	65.87	61.71	56.54	50.39
B85.0	2.69	4.48	6.14	7.61	8.84	9.77	10.37	9.68	8.67	7.38	5.88	4.24
B90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	β 30.0	β 35.0	β 40.0	β 45.0	β 50.0	β 55.0	β 60.0	β 65.0	β 70.0	β 75.0	β 80.0	β 85.0
B-90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B-85.0	3.55	2.01	1.24	0.94	0.66	0.41	0.20	0.04	0.00	0.00	0.00	0.00
B-80.0	45.74	37.39	29.35	21.64	13.86	7.76	4.34	1.34	0.38	0.12	0.00	0.00
B-75.0	110.55	96.60	82.27	67.28	51.57	35.44	21.14	9.53	3.59	0.36	0.08	0.00
B-70.0	242.73	186.13	151.28	122.72	98.68	74.70	51.58	28.77	12.14	3.02	0.18	0.00
B-65.0	688.34	542.27	381.63	243.67	161.16	119.71	86.10	55.92	26.93	7.42	0.68	0.01
B-60.0	1270.01	1065.37	821.14	587.77	357.95	200.11	128.18	84.02	47.69	16.46	2.24	0.03
B-55.0	1899.93	1624.80	1322.63	1021.83	695.58	405.70	197.87	115.74	68.55	28.03	3.67	0.05
B-50.0	2561.37	2222.11	1854.35	1470.95	1084.48	692.25	349.86	156.30	90.42	41.92	7.21	0.06
B-45.0	3187.60	2786.60	2386.78	1931.75	1469.88	1012.41	575.34	231.69	112.74	55.27	11.88	0.07
B-40.0	3771.06	3351.99	2866.91	2383.36	1853.23	1316.73	807.26	360.97	140.80	67.81	16.09	0.08
B-35.0	4309.53	3859.18	3352.75	2789.75	2212.67	1624.20	1042.58	514.95	173.18	79.83	20.89	0.23
B-30.0	4693.48	4308.04	3768.63	3180.97	2547.85	1896.70	1254.86	663.78	219.93	91.99	27.04	0.59
B-25.0	4949.54	4630.77	4094.01	3506.48	2828.30	2137.77	1453.30	802.26	263.32	102.40	32.27	0.88

IES Flood Report
Photometric Filename:BBT 150W.IES

Candela Tabulation - (Cont.)

V/H	β 30.0	β 35.0	β 40.0	β 45.0	β 50.0	β 55.0	β 60.0	β 65.0	β 70.0	β 75.0	β 80.0	β 85.0
B-20.0	5153.93	4834.21	4450.80	3779.08	3078.57	2344.30	1623.96	925.19	338.71	111.48	36.54	1.11
B-15.0	5313.19	4988.74	4602.64	3978.35	3277.05	2512.34	1755.94	1022.13	397.74	120.78	39.83	1.27
B-10.0	5426.53	5096.96	4710.23	4128.36	3421.20	2632.73	1851.43	1094.23	439.86	127.39	42.10	1.37
B-5.0	5494.22	5161.17	4775.12	4236.59	3511.93	2705.82	1909.13	1137.58	464.69	131.23	43.35	1.41
B0.0	5516.27	5181.19	4795.34	4272.08	3544.94	2730.71	1928.24	1151.35	472.05	132.25	43.56	1.40
B5.0	5480.95	5149.53	4764.56	4222.73	3503.81	2699.33	1905.30	1134.76	463.28	131.15	43.30	1.41
B10.0	5400.17	5073.83	4688.64	4108.91	3401.64	2617.83	1844.36	1088.36	437.20	127.23	42.02	1.37
B15.0	5274.48	4954.44	4564.00	3941.10	3239.73	2487.75	1746.75	1012.74	394.20	120.52	39.70	1.27
B20.0	5103.48	4788.70	4356.43	3719.35	3040.08	2312.42	1614.23	915.24	334.80	111.11	36.38	1.09
B25.0	4887.79	4568.39	4045.09	3462.68	2801.85	2104.56	1440.48	794.64	259.68	101.97	32.08	0.85
B30.0	4616.65	4191.21	3673.29	3099.34	2493.26	1871.52	1237.74	656.80	217.16	91.52	26.83	0.54
B35.0	4162.18	3727.80	3260.95	2744.82	2155.13	1605.13	1017.88	503.73	172.00	79.34	20.68	0.16
B40.0	3622.21	3238.29	2823.42	2305.71	1818.24	1292.66	793.35	351.31	140.02	67.30	15.92	0.01
B45.0	3031.61	2718.43	2291.60	1883.85	1441.37	976.91	560.49	226.27	111.73	54.72	11.82	0.01
B50.0	2434.26	2115.61	1802.01	1436.14	1041.79	678.07	336.72	155.24	89.49	41.37	7.28	0.01
B55.0	1828.38	1581.69	1278.62	968.83	678.24	386.59	193.58	114.28	67.68	27.53	3.79	0.00
B60.0	1210.15	996.58	789.76	560.43	338.12	194.82	126.44	82.79	46.83	16.20	2.22	0.00
B65.0	657.74	503.08	354.33	231.14	159.15	117.45	84.56	54.76	26.24	7.60	0.50	0.00
B70.0	227.00	180.83	148.43	119.70	96.39	72.94	50.18	27.87	12.15	3.02	0.01	0.00
B75.0	106.91	93.57	79.67	65.02	49.72	34.08	20.56	9.84	3.58	0.03	0.01	0.00
B80.0	43.32	35.36	28.07	21.24	14.24	8.26	4.27	0.85	0.03	0.01	0.00	0.00
B85.0	2.51	0.76	0.10	0.08	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00
B90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	β 90.0											
B-90.0	0.00											
B-85.0	0.00											
B-80.0	0.00											
B-75.0	0.00											
B-70.0	0.00											
B-65.0	0.00											
B-60.0	0.00											
B-55.0	0.00											
B-50.0	0.00											
B-45.0	0.00											
B-40.0	0.00											
B-35.0	0.00											
B-30.0	0.00											
B-25.0	0.00											
B-20.0	0.00											
B-15.0	0.00											
B-10.0	0.00											
B-5.0	0.00											
B0.0	0.00											
B5.0	0.00											
B10.0	0.00											

IES Flood Report

Photometric Filename:BBT 150W.IES

Candela Tabulation - (Cont.)

V/H	β 90.0
B15.0	0.00
B20.0	0.00
B25.0	0.00
B30.0	0.00
B35.0	0.00
B40.0	0.00
B45.0	0.00
B50.0	0.00
B55.0	0.00
B60.0	0.00
B65.0	0.00
B70.0	0.00
B75.0	0.00
B80.0	0.00
B85.0	0.00
B90.0	0.00
