



TECHNICAL DATA

**TYPE**

BIANCO floodlight with low wind resistance. Comprehensive range available in five sizes with extensive optical and light distributions from 50W up to 400W to cover all applications. Can be tilted in all directions thanks to its fixing galvanized and painted bracket.

**CHARACTERISTICS**

LEDs: 3030

Nomial efficacy: 120LM/W

Maximum LED: 1000mA

Lifetime L90B10:>50,000 hours

Luminous flux and efficacy at 4000°K and CRI>70

Luminous flux tolerance <+/-3%

Values may be subject to change du LED binning.

**OPENING/BEAM**

High efficiency Ra>80 LED. 120°

**MATERIAL**

Die-cast aluminium, Transparent 4mm

tempred-Glass


Aluminum frame

Steel Galvanized and painted bracket

PRO	CRI ≥ 80	
IP65		120 L°
220-240V 50/60Hz		50000h

Model:	BIANCO
Format:	Square
Location:	Exterior
Wattage:	200W
Materials:	Aluminium
Led Color:	3000K / 4000K / 6500K
Product Dimension:	368*338*90mm
IP Code:	65
Fixation:	Surface
CRI :	80
Lumen Output:	24000LM
Frequency:	50/60 Hz
Beam Angle:	120°
Net weight:	5.16kgs

DIMENSION DRAW

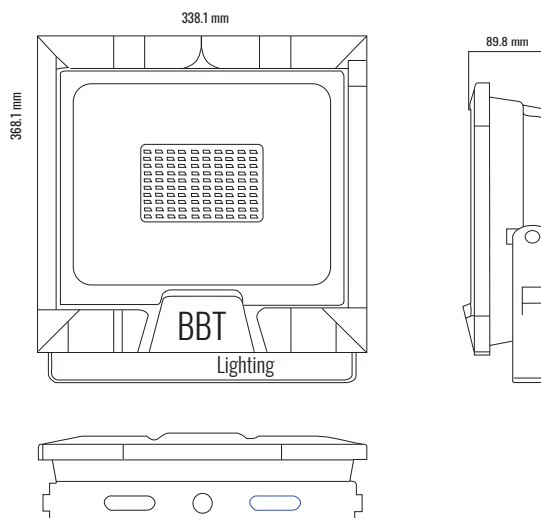

**OUTDOOR**