



TECHNICAL DATA

TYPE

UFO LED is the reflector that achieves the most advanced result in industrial, sporting and large area lighting. Human centric Lighting (Lighting applications that focus on human wellbeing) Aesthetically pleasing and energy-saving light that lasts in time.

CHARACTERISTICS

LEDs: 3030
 Nomial efficacy: 103.977 lm/W
 Maximum LED: 1000mA
 Lifetime L90B10:>50,000 hours
 Luminous flux and efficacy aht 4000°K and CRI>70
 Luminous flux tolerance <+/-3%
 Values may be subject to change du LED binning.
 High efficiency Ra>80 LED,


MATERIAL

Die-cast aluminium, Transparent 4mm
 tempred-Glass
 Aluminum frame
 Steel Galvanized and painted bracket.

PRO	CRI ≥ 80	
IP66		120 L°
220-240V 50/60Hz		50000h L70

Model:	Sufo
Format:	Round
Location:	Interior/Exterior
Wattage:	200W
Materials:	Aluminum+Glass
Led Color:	3000K / 4000K / 6500K
Product Dimension:	φ 380mm
IP Code:	66
Fixation:	Suspended
CRI :	80
Lumen Output:	20,795LM
Frequency:	50/60 Hz
Beam Angle:	120°
Net weight:	2.88kgs

DIMENSION DRAW

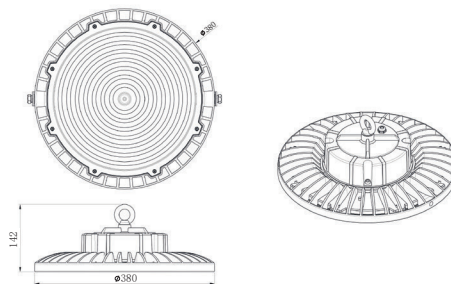

INDOOR / OUTDOOR