



TECHNICAL DATA

TYPE

Ultra-flat LED fixtures with vertical lighting.
Can be used in: meeting room, office, factory, residential housing and public facilities, commercial use; schools, hospitals,...

CHARACTERISTICS

Side heat dissipation. Immediate switch-on. High colour rendering. Ra>80. Flicker free power supply included. Do not use with dimmer.

Using efficient constant current isolation drive, high PF. Wide input voltage AC100-240V/50/60HZ.

MATERIALS

White painted aluminum body high transmittance optical PMMA lenses.


NOTICE

Before cleaning, please be sure to shut off the power supply, and clean with dry cloth, do not use chemical or corrosive items for cleaning.

| | | |
|---------------------|----------|--------|
| PRO | CRI ≥ 80 | |
| IP20 | | L° |
| 220-240V 50/60Hz | | 30000h |

DIMENSION DRAW

| | |
|--------------------|-----------------------|
| Model: | Venice |
| Format: | Square |
| Location: | Interior |
| Wattage: | 72W |
| Materials: | Aluminium |
| Led Color: | 3000K / 4000K / 6500K |
| Product Dimension: | 600x600mm |
| IP Code: | 20 |
| Fixation: | Recessed |
| CRI : | 80 |
| Lumen Output: | 7,350LM |
| Frequency: | 50/60 Hz |
| Beam Angle: | L° |

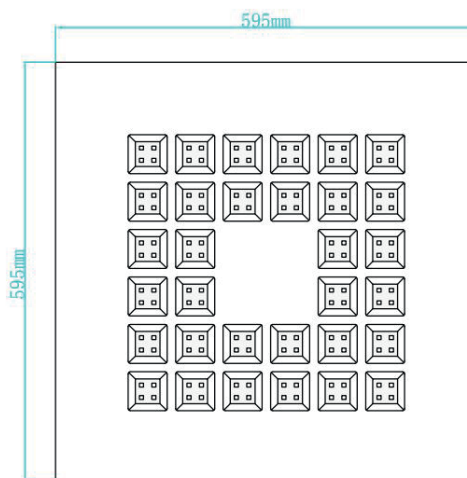

INDOOR