
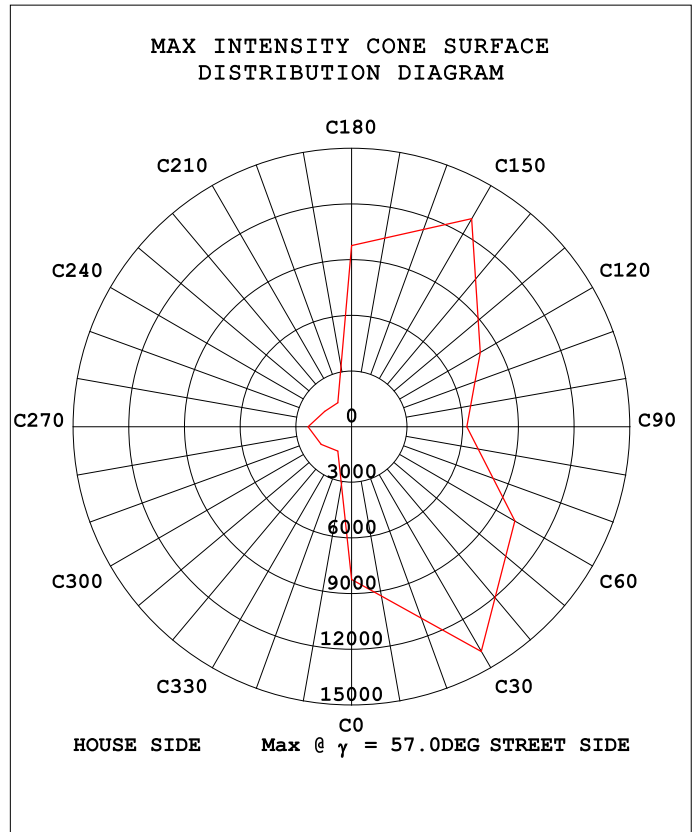


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 149.31 lm/W
MODEL	5000K	I _{max} (cd)	13980	η street_up (%)	0.2	
NOMINAL POWER (W)	200	LOR (%)	100.0	η street_down (%)	74.0	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	28513	η house_up (%)	0.4	
NOMINAL FLUX (lm)	28512.5	MAXIMUM @ (C, γ)	30,57.0	η house_down (%)	25.4	
LAMPS INSIDE	1	η up (%)	0.6	76 FLASHAREA (m2)	0.05000	
TEST VOLTAGE (V)	230	η down (%)	99.4	SLI	21.350	

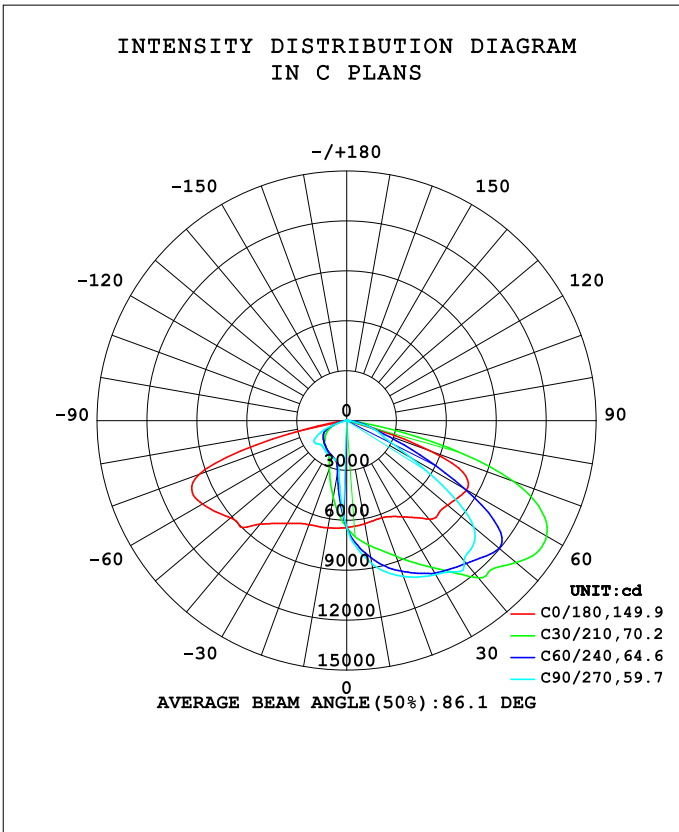


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity: 65.0%
 Test Distance: 9.300m [K=1.0000]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

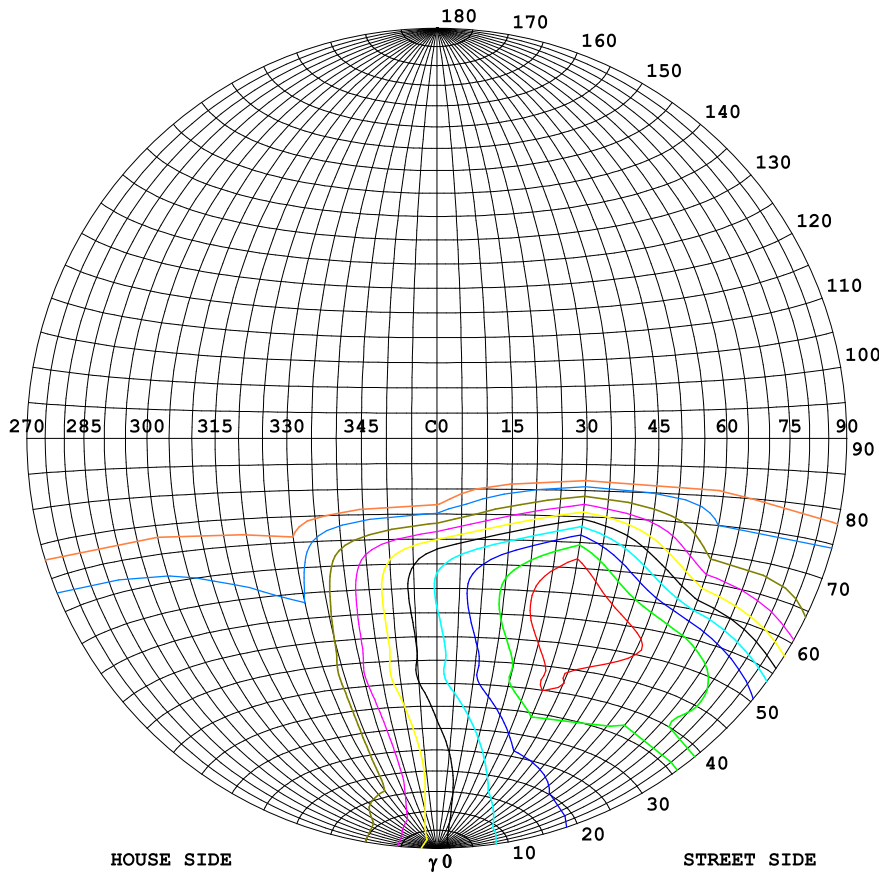

Classification:



IES:Type III - Short
 CIE:Average - Short
 IES:Cut-off
 CIE:Semi-cut-off
 Max.At80:66.77cd/klm
 Max.At90:2.706cd/klm
 Max.80-90:66.77cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	13980
90%	12582
80%	11184
70%	9786
60%	8388
50%	6990
40%	5592
30%	4194
20%	2796
10%	1398
5%	699

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

**COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM**

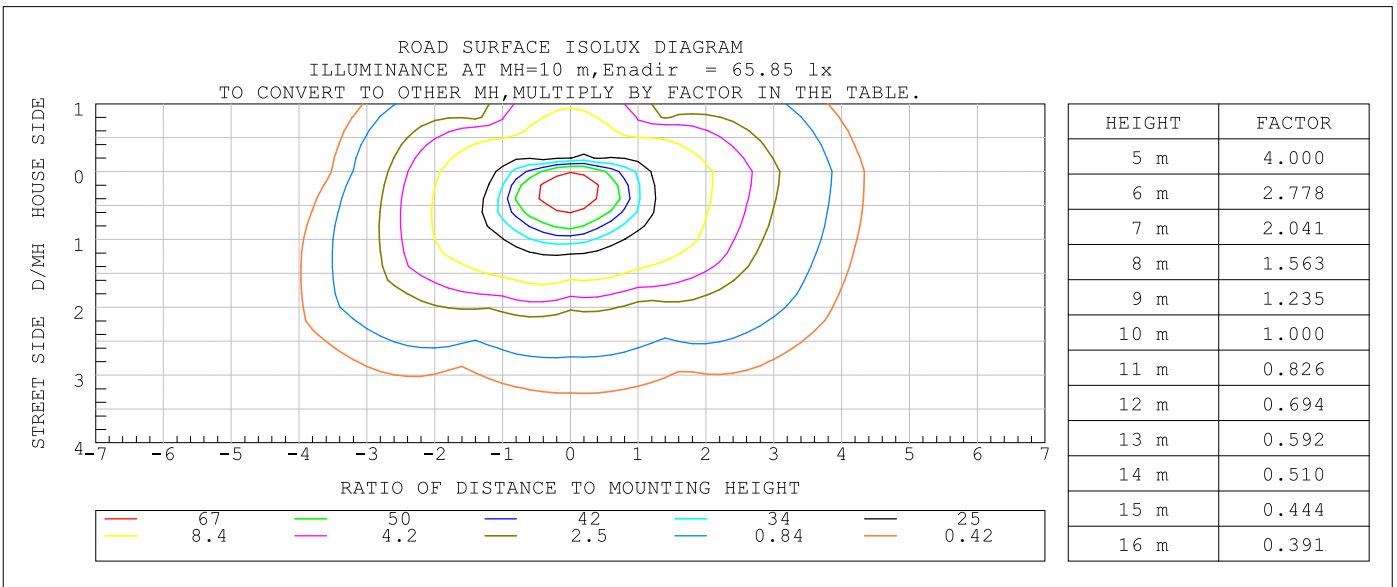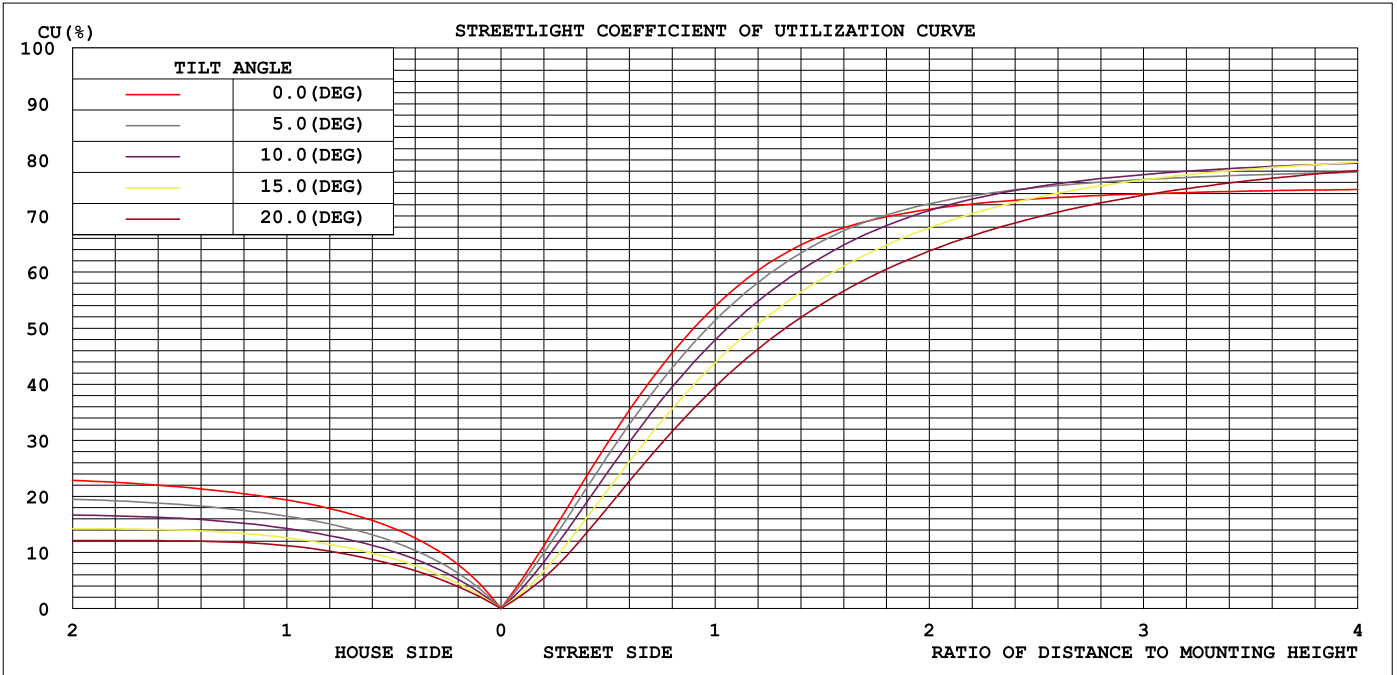

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2024-11-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.477
Humidity: 65.0%
Test Distance: 9.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	629.6	797.2	872.7	828.4	654.6	398.5	280.9	353.7	0- 10	587.5	587.5	2.06,2.06
20	621.8	915.2	995.4	945.0	665.2	272.0	239.9	251.3	10- 20	1702	2289	8.03,8.03
30	667.9	1038	1068	1038	713.3	220.9	232.1	230.2	20- 30	2898	5187	18.2,18.2
40	773.3	1177	1099	1135	813.1	199.4	216.1	212.0	30- 40	4218	9405	33,33
50	791.5	1261	996.7	1164	910.8	177.1	220.6	189.7	40- 50	5466	14871	52.2,52.2
60	832.4	1102	447.5	928.5	1002	150.3	223.6	159.4	50- 60	6019	20890	73.3,73.3
70	536.8	653.4	203.8	551.5	945.2	93.49	109.8	92.18	60- 70	4953	25843	90.6,90.6
80	24.69	133.8	41.17	124.8	109.8	18.82	0.5224	10.92	70- 80	2284	28127	98.6,98.6
90	1.933	3.455	5.621	6.139	3.377	1.409	0.7139	1.378	80- 90	209.5	28336	99.4,99.4
100	2.918	0.8833	0.6255	0.6640	2.428	2.641	1.461	2.513	90-100	18.15	28354	99.4,99.4
110	3.571	1.194	0.8204	0.8625	3.233	3.697	2.687	3.565	100-110	22.08	28377	99.5,99.5
120	4.031	1.523	1.014	1.092	3.757	4.451	3.834	4.500	110-120	26.88	28403	99.6,99.6
130	4.313	1.806	1.149	1.290	4.195	4.884	4.739	5.162	120-130	28.74	28432	99.7,99.7
140	4.266	2.061	1.276	1.484	4.290	5.070	5.192	5.220	130-140	27.05	28459	99.8,99.8
150	4.105	2.395	1.498	1.744	4.156	5.058	5.394	4.962	140-150	22.62	28482	99.9,99.9
160	4.023	2.838	2.029	2.169	4.094	4.777	5.104	4.442	150-160	16.84	28499	100,100
170	3.996	3.363	2.841	2.712	4.054	4.381	4.436	3.864	160-170	10.36	28509	100,100
180	4.045	3.920	3.667	3.320	4.049	3.921	3.665	3.319	170-180	3.518	28513	100,100
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

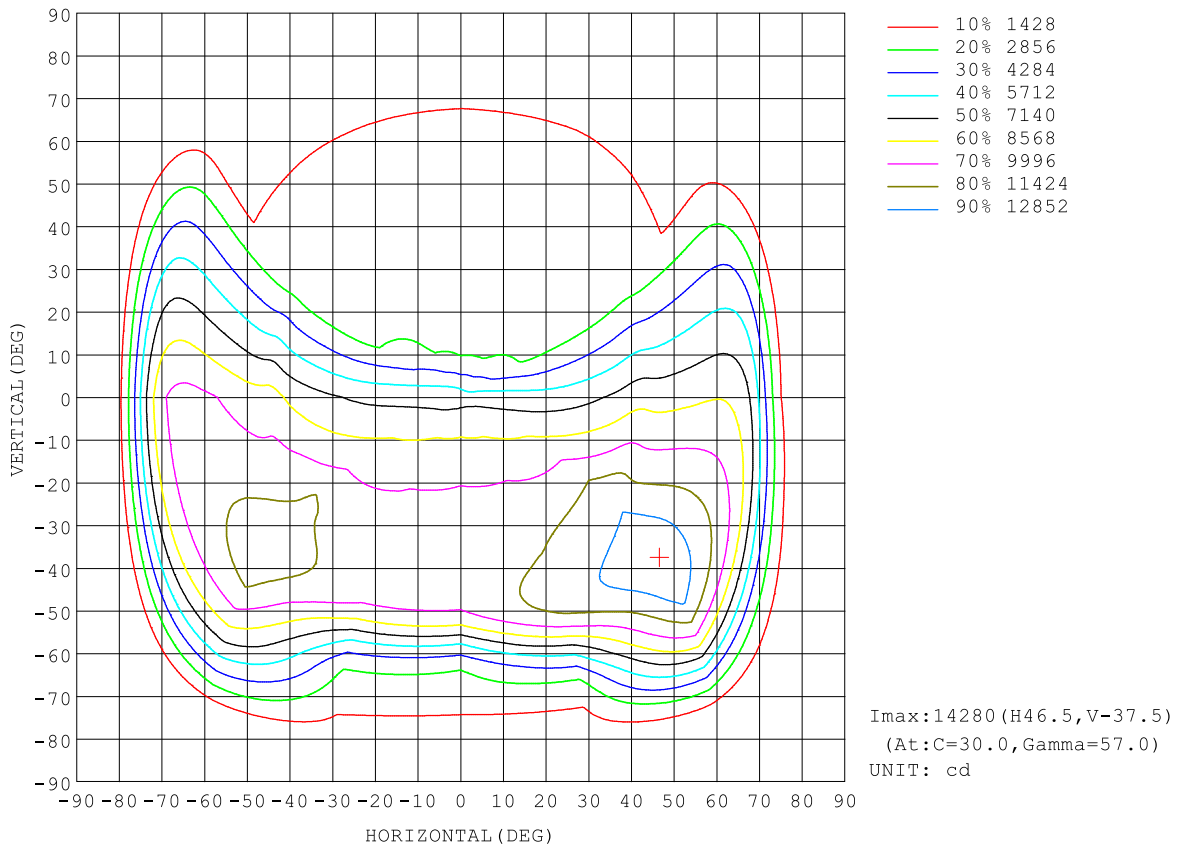

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

Planar Illuminance Curve

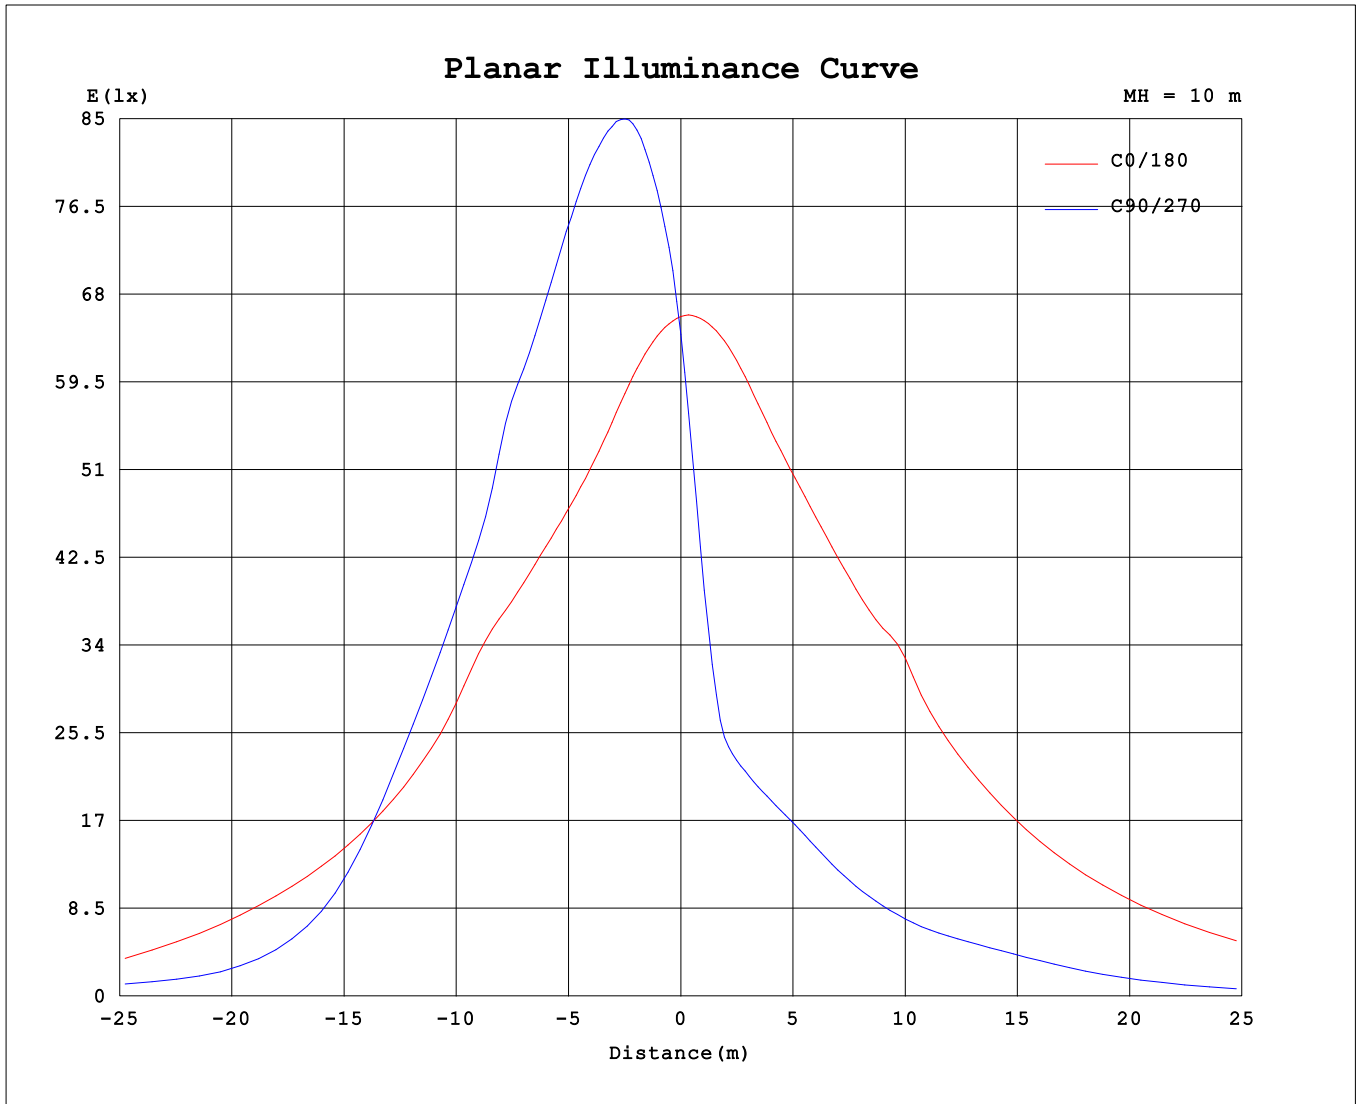


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity: 65.0%
 Test Distance: 9.300m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

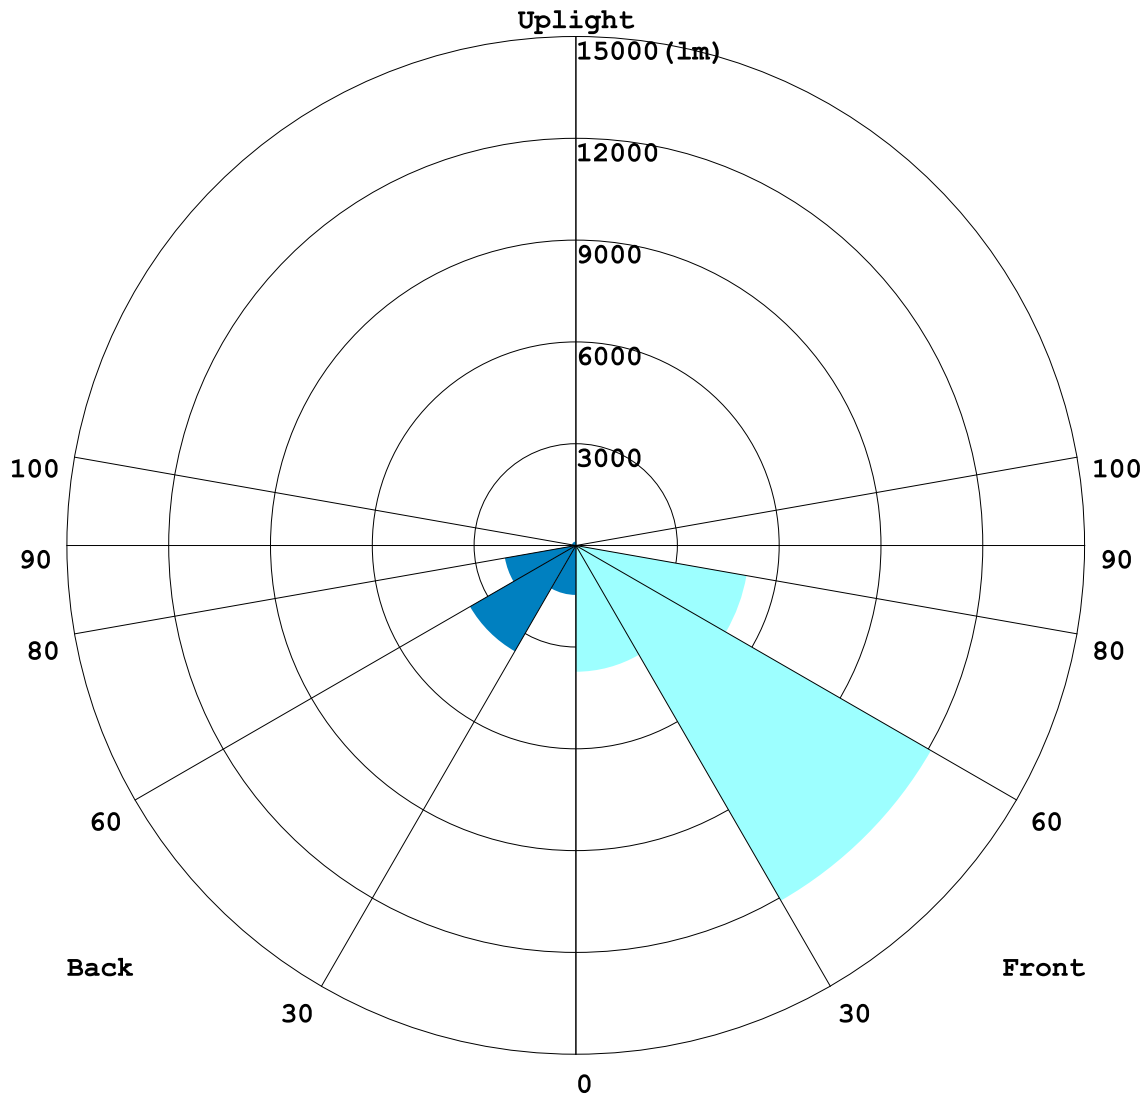

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

BUG REPORT

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	3726.8	13.1
FM - Front-Medium(30-60)	12095	42.4
FH - Front-High(60-80)	5111.8	17.9
FVH - Front-Very High(80-90)	168.82	0.6
Total Forward Light	21160	74.2

BL - Back-Low(0-30)	1460.4	5.1
BM - Back-Medium(30-60)	3607.6	12.7
BH - Back-High(60-80)	2125.1	7.5
BVH - Back-Very High(80-90)	40.665	0.1
Total Back Light	7352.7	25.8

UL - Uplight-Low(90-100)	18.151	0.1
UH - Uplight-High(100-180)	158.08	0.6
Total Up Light	176.24	0.6

BUG(Back,Up,Glare) Rating	B3-U3-G3
----------------------------------	-----------------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	7233.8	118.97	7352.7
Street Side	21103	57.268	21160


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

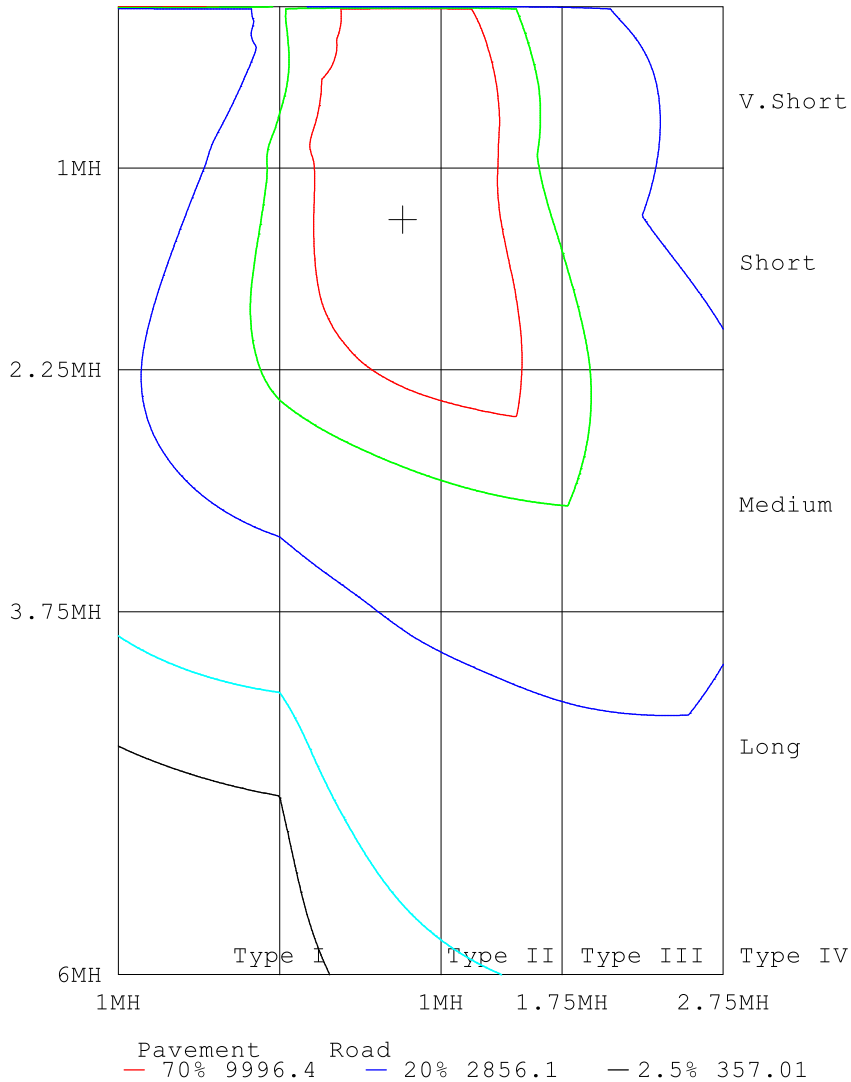

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.14V I:0.8464A P:190.96W PF:0.9803 Freq:49.99Hz Lamp Flux:28512.5x1 lm		
NAME: ORCA 181101 200W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: BBT LIGHTING	SUR.:	Shielding Angle:

Table--1

UNIT: X10cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	643	643	643	643	643	643	643	643	643	643	643	643						
5	636	709	752	775	769	732	649	561	481	442	458	528						
10	630	760	835	873	860	796	655	470	326	281	300	408						
15	623	808	908	945	933	853	659	381	251	248	254	312						
20	622	868	963	995	983	906	665	308	236	240	243	260						
25	637	939	1012	1037	1023	963	683	251	226	237	236	244						
30	668	1018	1059	1068	1052	1023	713	223	218	232	230	231						
35	712	1113	1088	1109	1066	1099	756	209	210	224	220	221						
40	773	1234	1120	1099	1083	1188	813	199	200	216	208	216						
45	784	1255	1159	1071	1082	1214	905	194	191	213	201	209						
50	792	1326	1196	997	1059	1271	911	171	183	221	197	182						
55	813	1390	1110	756	913	1300	958	157	172	235	195	162						
60	832	1387	815	447	607	1256	1002	139	161	224	183	135						
65	791	1294	487	262	352	1120	1025	116	141	178	152	109						
70	537	1062	242	204	232	877	945	85.1	102	110	105	79.3						
75	143	637	137	129	163	543	565	55.4	54.1	37.8	47.7	46.6						
80	24.7	190	76.9	41.2	97.8	152	110	25.6	12.0	0.52	4.82	17.1						
85	6.97	16.9	34.3	16.7	44.6	24.7	18.2	5.75	0.84	0.55	0.62	2.80						
90	1.93	1.90	5.02	5.62	7.72	4.53	3.38	1.83	0.98	0.71	0.88	1.89						
95	2.42	0.97	0.82	0.92	0.94	0.73	1.97	2.50	1.48	0.99	1.33	2.55						
100	2.92	1.13	0.64	0.63	0.65	0.68	2.43	3.19	2.08	1.46	1.89	3.15						
105	3.31	1.34	0.72	0.72	0.72	0.78	2.88	3.75	2.69	2.05	2.51	3.61						
110	3.57	1.56	0.82	0.82	0.82	0.91	3.23	4.15	3.24	2.69	3.12	4.01						
115	3.81	1.78	0.93	0.92	0.91	1.04	3.49	4.49	3.74	3.30	3.67	4.44						
120	4.03	2.01	1.03	1.01	1.00	1.19	3.76	4.74	4.16	3.83	4.17	4.84						
125	4.19	2.22	1.12	1.09	1.07	1.32	4.01	4.89	4.52	4.31	4.65	5.14						
130	4.31	2.39	1.21	1.15	1.15	1.44	4.20	4.99	4.77	4.74	5.06	5.27						
135	4.34	2.53	1.33	1.21	1.22	1.56	4.30	5.06	4.92	5.03	5.31	5.18						
140	4.27	2.64	1.48	1.28	1.28	1.69	4.29	5.08	5.06	5.19	5.40	5.04						
145	4.18	2.77	1.66	1.36	1.37	1.83	4.22	5.03	5.20	5.32	5.40	4.87						
150	4.11	2.91	1.88	1.50	1.51	1.98	4.16	4.89	5.23	5.39	5.28	4.64						
155	4.06	3.06	2.14	1.72	1.72	2.16	4.12	4.76	5.12	5.32	5.05	4.38						
160	4.02	3.22	2.45	2.03	2.00	2.34	4.09	4.62	4.93	5.10	4.76	4.12						
165	4.00	3.39	2.79	2.41	2.32	2.54	4.07	4.47	4.69	4.79	4.42	3.86						
170	4.00	3.57	3.15	2.84	2.66	2.77	4.05	4.32	4.45	4.44	4.08	3.64						
175	4.03	3.77	3.51	3.26	3.00	3.01	4.06	4.16	4.17	4.06	3.74	3.46						
180	4.05	3.98	3.86	3.67	3.37	3.26	4.05	3.97	3.87	3.67	3.38	3.26						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	30.0	60.0	90.0	120.0	150.0	180.0	210.0	240.0	270.0
0.0	6433	6433	6433	6433	6433	6433	6433	6433	6433	6433
3.0	6391	6846	7147	7307	7268	6998	6469	5961	5506	5271
6.0	6352	7195	7700	7961	7877	7460	6500	5435	4454	4012
9.0	6308	7490	8191	8540	8424	7843	6535	4890	3516	3040
12.0	6271	7792	8660	9060	8927	8200	6568	4336	2807	2590
15.0	6233	8083	9076	9455	9331	8527	6594	3811	2509	2485
18.0	6209	8415	9425	9772	9650	8855	6621	3358	2408	2425
21.0	6236	8823	9730	10055	9918	9177	6675	2943	2336	2390
24.0	6323	9244	10025	10296	10164	9517	6778	2601	2279	2370
27.0	6472	9695	10314	10509	10380	9867	6931	2372	2230	2355
30.0	6679	10177	10587	10682	10521	10235	7133	2234	2183	2321
33.0	6927	10716	10763	10883	10594	10666	7373	2145	2137	2271
36.0	7223	11363	10950	11233	10683	11160	7653	2072	2083	2219
39.0	7605	12103	11131	11228	10811	11746	7993	2005	2023	2174
42.0	7902	12531	11349	10794	10814	12025	8489	1963	1966	2144
45.0	7842	12546	11592	10709	10824	12145	9050	1942	1913	2127
48.0	7844	12973	11864	10386	10756	12464	8993	1781	1858	2150
51.0	7950	13424	11948	9666	10439	12796	9193	1688	1811	2238
54.0	8081	13818	11448	8193	9583	12992	9486	1604	1740	2328
57.0	8229	13980	10159	6208	8021	12942	9765	1508	1684	2347
60.0	8324	13870	8149	4475	6072	12562	10019	1393	1613	2236
63.0	8206	13468	6047	3173	4441	11874	10212	1257	1512	1995
66.0	7667	12638	4309	2484	3142	10796	10209	1098	1332	1663
69.0	6150	11257	2781	2150	2468	9351	9760	911.0	1101	1228
72.0	3668	9136	1885	1805	2038	7519	8350	730.6	837.7	802.4
75.0	1430	6375	1372	1294	1631	5428	5651	553.7	541.2	377.7
78.0	403.9	3524	988.8	684.7	1231	3132	2621	372.1	269.3	57.12
81.0	202.7	1185	671.8	340.0	859.5	873.9	610.1	203.5	69.17	4.678
84.0	93.64	228.2	418.6	196.8	539.4	313.0	235.3	83.41	10.80	5.257
87.0	34.61	93.28	197.6	111.1	271.2	149.4	98.94	27.25	7.657	6.128
90.0	19.33	18.97	50.23	56.21	77.16	45.29	33.77	18.32	9.828	7.139
93.0	22.22	9.844	10.86	11.07	12.02	9.804	18.00	22.21	12.65	8.510
96.0	25.25	9.848	7.353	7.747	8.173	6.897	20.59	26.41	15.98	10.70
99.0	28.22	10.90	6.315	6.123	6.491	6.673	23.35	30.64	19.62	13.56
102.0	30.97	12.12	6.643	6.613	6.681	7.183	26.14	34.36	23.31	16.82
105.0	33.14	13.40	7.205	7.199	7.206	7.837	28.82	37.46	26.90	20.47
108.0	34.77	14.73	7.813	7.802	7.777	8.573	31.10	40.01	30.29	24.27
111.0	36.19	16.05	8.456	8.412	8.369	9.354	32.86	42.23	33.45	28.15
114.0	37.61	17.37	9.097	9.031	8.941	10.16	34.39	44.26	36.44	31.82
117.0	39.02	18.75	9.722	9.616	9.491	11.00	35.94	46.02	39.17	35.20
120.0	40.31	20.12	10.32	10.14	9.991	11.86	37.57	47.40	41.60	38.34
123.0	41.36	21.39	10.87	10.61	10.45	12.66	39.16	48.35	43.82	41.26
126.0	42.21	22.55	11.40	11.00	10.88	13.39	40.52	49.11	45.79	44.05
129.0	42.94	23.61	11.95	11.36	11.32	14.12	41.63	49.77	47.36	46.62
132.0	43.39	24.50	12.57	11.74	11.75	14.84	42.49	50.23	48.38	48.76
135.0	43.35	25.26	13.28	12.11	12.16	15.57	42.99	50.60	49.16	50.30
138.0	42.97	25.95	14.12	12.50	12.54	16.36	43.04	50.80	49.97	51.35
141.0	42.49	26.67	15.09	12.90	12.97	17.19	42.79	50.82	50.87	52.19
144.0	41.98	27.42	16.20	13.40	13.49	18.01	42.37	50.48	51.74	52.96
147.0	41.50	28.21	17.43	14.05	14.18	18.90	41.93	49.75	52.26	53.61
150.0	41.05	29.08	18.78	14.98	15.11	19.83	41.56	48.92	52.26	53.94
153.0	40.73	29.98	20.30	16.22	16.30	20.85	41.31	48.08	51.73	53.70
156.0	40.50	30.91	22.00	17.76	17.74	21.93	41.14	47.32	50.84	52.88
159.0	40.28	31.89	23.88	19.61	19.42	23.02	40.98	46.50	49.73	51.56
162.0	40.11	32.90	25.86	21.74	21.27	24.18	40.83	45.66	48.41	49.86
165.0	39.99	33.93	27.94	24.11	23.23	25.42	40.68	44.70	46.92	47.87
168.0	39.92	34.98	30.08	26.67	25.24	26.73	40.56	43.78	45.46	45.80
171.0	40.00	36.11	32.24	29.29	27.24	28.16	40.56	42.87	43.94	43.65
174.0	40.22	37.31	34.41	31.81	29.23	29.58	40.57	41.95	42.29	41.35
177.0	40.34	38.55	36.59	34.27	31.49	31.18	40.53	40.91	40.59	39.00
180.0	40.45	39.77	38.64	36.67	33.75	32.64	40.49	39.74	38.67	36.65
G/C	300.0	330.0								
0.0	6433	6433								
3.0	5373	5772								
6.0	4207	5033								
9.0	3276	4304								
12.0	2675	3672								
15.0	2538	3125								
18.0	2462	2723								
21.0	2410	2564								
24.0	2368	2471								
27.0	2334	2384								
30.0	2296	2308								

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity: 65.0%
 Test Distance: 9.300m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

33.0	2244	2244
36.0	2175	2196
39.0	2105	2165
42.0	2047	2159
45.0	2008	2088
48.0	1986	1896
51.0	1974	1786
54.0	1966	1662
57.0	1908	1515
60.0	1833	1349
63.0	1669	1192
66.0	1434	1031
69.0	1143	855.0
72.0	818.4	666.2
75.0	477.3	465.8
78.0	176.1	278.3
81.0	24.13	131.5
84.0	6.750	42.13
87.0	6.873	16.60
90.0	8.780	18.87
93.0	11.28	22.76
96.0	14.30	26.76
99.0	17.70	30.42
102.0	21.36	33.45
105.0	25.13	36.07
108.0	28.87	38.51
111.0	32.39	40.98
114.0	35.69	43.55
117.0	38.76	46.04
120.0	41.68	48.39
123.0	44.57	50.37
126.0	47.37	51.84
129.0	49.87	52.62
132.0	51.82	52.50
135.0	53.14	51.81
138.0	53.80	50.95
141.0	54.05	50.05
144.0	54.04	49.05
147.0	53.66	47.83
150.0	52.80	46.37
153.0	51.50	44.82
156.0	49.94	43.23
159.0	48.22	41.68
162.0	46.31	40.15
165.0	44.24	38.61
168.0	42.18	37.28
171.0	40.16	36.06
174.0	38.12	34.94
177.0	35.98	33.82
180.0	33.76	32.61

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.477
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: