



TECHNICAL DATA

TYPE

PUFO LED is the reflector that achieves the most advanced result in industrial, sporting and large area lighting. Human centric Lighting (Lighting applications that focus on human wellbeing) Aesthetically pleasing and energy-saving light that lasts in time.

CHARACTERISTICS

- LEDs: 3030
- Nomial efficacy: 117.759 lm/W
- Maximum LED: 1000mA
- Lifetime L90B10:>50,000 hours
- Luminous flux and efficacy aht 4000°K and CRI>70
- Luminous flux tolerance <+/-3%
- Values may be subject to change du LED binning.
- High efficiency Ra>80 LED,


MATERIAL

- Die-cast aluminium, Transparent 4mm
- tempred-Glass
- Aluminum frame
- Steel Galvanized and painted bracket.

PRO	CRI ≥ 80	
IP65		L°
110-240V 50/60Hz		50000h L70

Model:	Pufo
Format:	Round
Location:	Interior/Exterior
Wattage:	200W
Materials:	ALU+PC 1250Z
Led Color:	3000K / 4000K / 6500K
Product Dimension:	D339*H184
IP Code:	65
Fixation:	Suspended
CRI :	80
Lumen Output:	23,552LM
Frequency:	50/60 Hz
Beam Angle:	L°
Net weight:	2.43kgs

DIMENSION DRAW

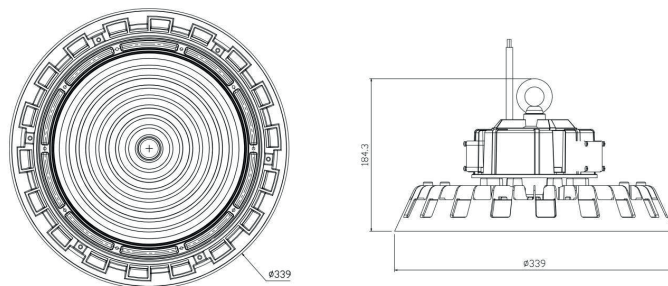

INDOOR / OUTDOOR