

TECHNICAL DATA

TYPE

NIFO LED is the reflector that achieves the most advanced result in industrial, sporting and large area lighting. Human centric Lighting (Lighting applications that focus on human wellbeing) Aesthetically pleasing and energy-saving light that lasts in time.

CHARACTERISTICS

LEDs: 3030

Nomial efficacy: 145 lm/W

Maximum LED: 1000mA

Lifetime L90B10 > 50,000 hours

Luminous flux and efficacy aht 4000°K and CRI > 70

Luminous flux tolerance < +/- 3%

Values may be subject to change du LED binning.

High efficiency Ra > 80 LED,


MATERIAL

Die-cast aluminium, Transparent 4mm

tempred-Glass


Aluminum frame

Steel Galvanized and painted bracket.

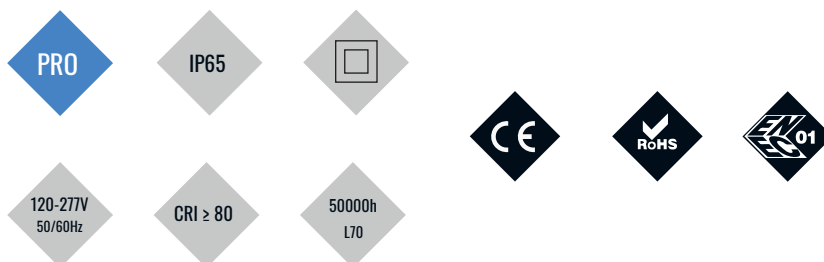

Model:	Nifo
Format:	Round
Location:	Exterior/Interior
Wattage:	240W
Materials:	ADC12 Die-cast aluminum, sandblasting oxidation
Led Color:	3000K / 4000K / 6500K
Product Dimension:	ø380mm, H 205mm
IP Code:	65
Fixation:	Ceiling
CRI :	80
Lumen Output:	34,800LM
Frequency:	50/60 Hz
Beam Angle:	110±10
Net weight:	7.04kgs

DIMENSION DRAW

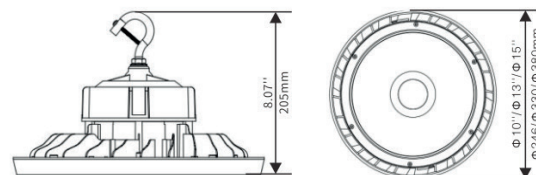

**OUTDOOR/
INDOOR**