

TECHNICAL DATA



TYPE

Grigio floodlight with low wind resistance. Comprehensive range available in six sizes with extensive optical and light distributions from 50W up to 400W to cover all applications. Can be tilted in all directions thanks to its fixing galvanized and painted bracket.

CHARACTERISTICS

LEDs: 2835
 Nominal efficacy: 130 lm/W
 Maximum LED: 1000mA
 Lifetime L90B10: >30,000 hours
 Luminous flux and efficacy at 4000°K and CRI>70
 Luminous flux tolerance <+/-3%
 Values may be subject to change due to LED binning.

OPENING/BEAM


High efficiency Ra>80 LED. 90°

MATERIAL

Die-cast aluminium, Transparent 4mm
 tempered-Glass
 Aluminum frame
 Steel Galvanized and painted bracket

Model:	Grigio
Format:	Square
Location:	Exterior
Wattage:	50W
Materials:	Aluminium
Led Color:	3000K / 4000K / 6500K
Product Dimension:	278*181*45mm
IP Code:	65
Fixation:	Surface
CRI :	80
Lumen Output:	6500LM
Frequency:	50/60 Hz
Beam Angle:	90°
Net weight:	1.50kgs

DIMENSION DRAW

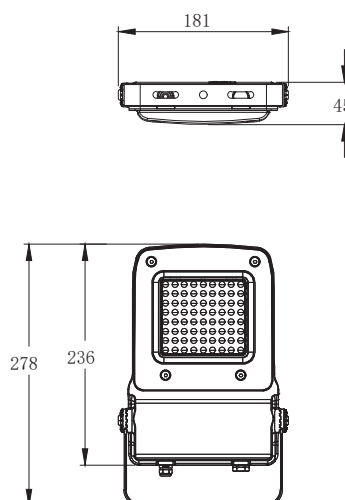

OUTDOOR