



PRO	CRI ≥ 80	
IP65		90 L°
AC85-265V 50/60Hz		50000h

TECHNICAL DATA

TYPE

Grigio floodlight with low wind resistance. Comprehensive range available in six sizes with extensive optical and light distributions from 50W up to 400W to cover all applications. Can be tilted in all directions thanks to its fixing galvanized and painted bracket.

CHARACTERISTICS

LEDs: 2835

Nominal efficacy: 130 lm/W

Maximum LED: 1000mA

Lifetime L90B10: >50,000 hours

Luminous flux and efficacy at 5000°K and CRI>80

Luminous flux tolerance <+/-3%

Values may be subject to change due to LED binning.

OPENING/BEAM

High efficiency Ra>80 LED. 90°

MATERIAL

Die-cast aluminium, Transparent 4mm


tempered-Glass

Aluminum frame

Steel Galvanized and painted bracket

Model:	Grigio
Format:	Square
Location:	Exterior
Wattage:	150W
Materials:	Aluminium
Led Color:	3000K / 4000K / 6500K
Product Dimension:	400*277*54mm
IP Code:	65
Fixation:	Surface
CRI :	80
Lumen Output:	19.500LM
Frequency:	50/60 Hz
Beam Angle:	90°
Net weight:	3.31kgs

DIMENSION DRAW

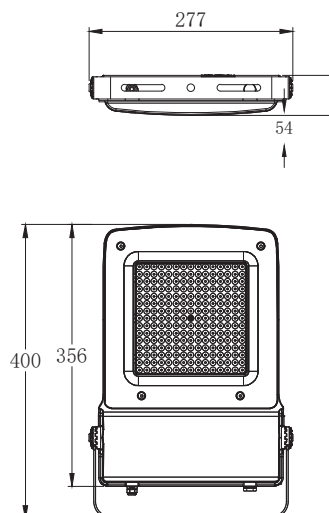

OUTDOOR