



## TECHNICAL DATA

### TYPE

Grigio floodlight with low wind resistance. Comprehensive range available in six sizes with extensive optical and light distributions from 50W up to 400W to cover all applications. Can be tilted in all directions thanks to its fixing galvanized and painted bracket.

### CHARACTERISTICS

- LEDs: 2835
- Nominal efficacy: 130 lm/W
- Maximum LED: 1000mA
- Lifetime L90B10: >30,000 hours
- Luminous flux and efficacy at 4000°K and CRI>70
- Luminous flux tolerance <+/-3%
- Values may be subject to change due to LED binning.

### OPENING/BEAM

High efficiency Ra>80 LED. 90°


### MATERIAL

- Die-cast aluminium, Transparent 4mm
- tempered-Glass
- Aluminum frame
- Steel Galvanized and painted bracket

PRO	CRI ≥ 80	
IP65		90 L°
AC85-265V 50/60Hz		30000h

Model:	Grigio
Format:	Square
Location:	Exterior
Wattage:	400W
Materials:	Aluminium
Led Color:	3000K / 4000K / 6500K
Product Dimension:	542*383*75mm
IP Code:	65
Fixation:	Surface
CRI :	80
Lumen Output:	52000LM
Frequency:	50/60 Hz
Beam Angle:	90°
Net weight:	9.12kgs

## DIMENSION DRAW

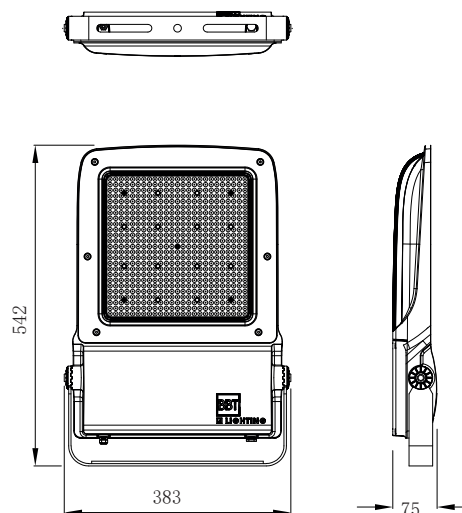

# OUTDOOR