



General information

❖ Features

- High efficiency
- Uniform light spot
- No-need lens holder
- Cut-off Light Distribution

❖ Applications

- street lamp

❖ Material information

- Lens material: PC(UV)
- The working temperature is: -35°C ~ +120°C
- Storage environment temperature is 0°C ~ 40°C, humidity is 30%~95%

❖ Application Notes

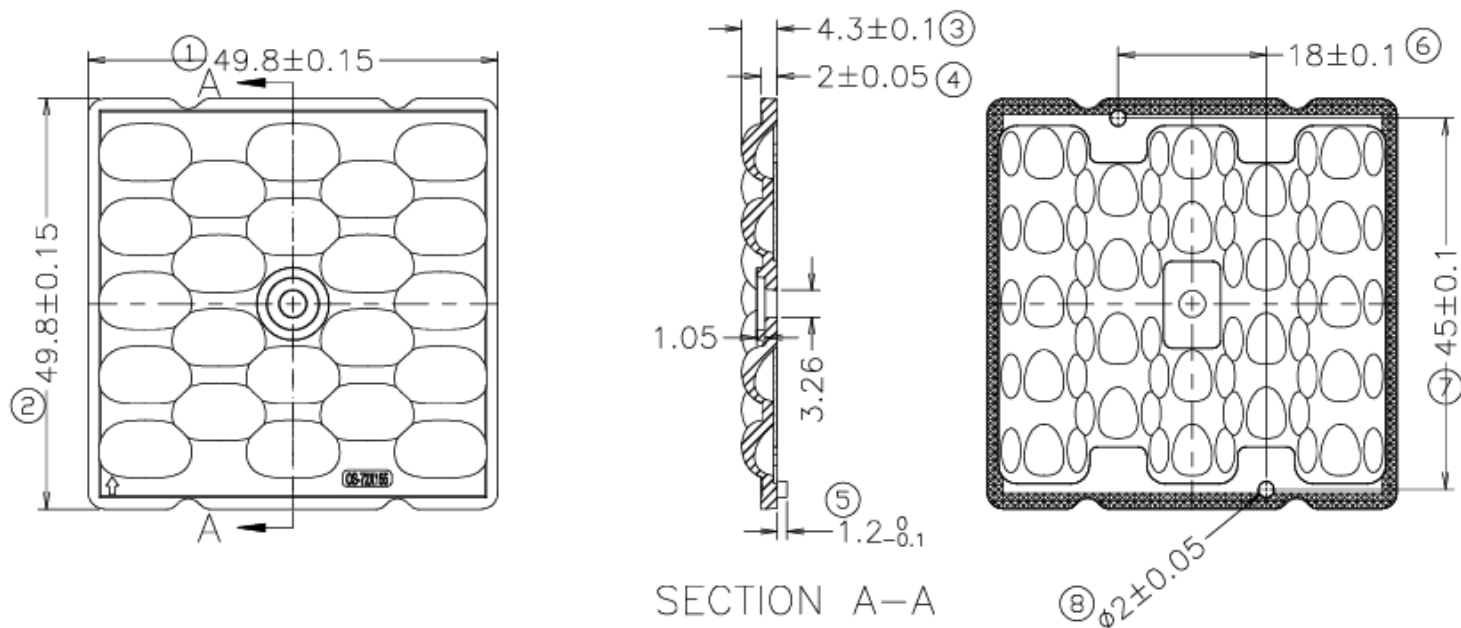
- Please use a litter water and soft fabric(air-laid paper) to clean the lens if necessary
- Forbid the use of industrial solvents to clean the lens, such as alcohol.
- Optic Lens has the function to change the ray of light; it is made of optical material, and the effect shall be influenced by pollution. Please do not open the packaging before using it to avoid dust pollution.
- Protect the product from the sun and other ultraviolet ray, as the se will lead to aging, change color, crack, etc.
- Please wear gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

Packing information

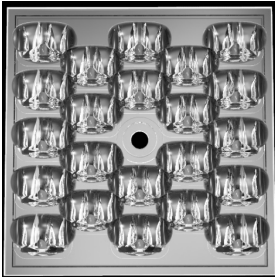
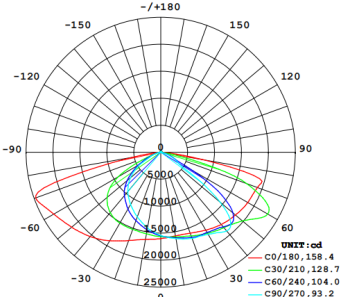
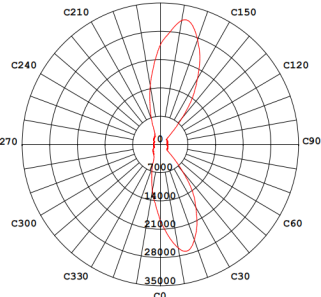
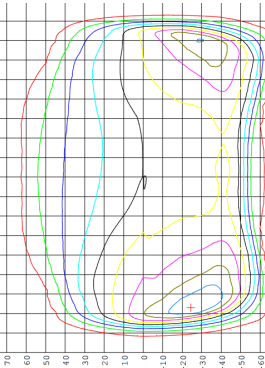
Material	Size	Quantity
BOX	20*232*15MM	28PCS
Carton	475*430*285MM	1176PCS

Dimension

- 1、Installation method: Screw
- 2、Lens dimension



Photometric data (Simulated)

Picture	<div>Item No</div> <div>AZR0-400W-2835-T2</div>	<div>Matched LED</div> <div>2835</div>
	<div> <div>INTENSITY DISTRIBUTION DIAGRAM IN C PLANS</div>  <div> UNIT : cd C0/180, 158.4 C30/210, 128.7 C60/240, 104.0 C90/270, 93.2 </div> <div>AVERAGE BEAM ANGLE (50%) : 121.1 DEG</div> </div> <div> <div>MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM</div>  <div> HOUSE SIDE Max I y = 69.0 DEG STREET SIDE </div> </div>	
<div>Photometric data (Simulated)</div>		