



## General information

### ❖ Features

- High efficiency
- Uniform light spot
- No-need lens holder
- Cut-off Light Distribution

### ❖ Applications

- Flood light

### ❖ Material information

- Lens material: PC(UV)
- The working temperature is: -40°C ~ +120°C
- Storage environment temperature is 0°C ~ 40°C, humidity is 30%~95%

### ❖ Application Notes


- Please use a litter water and soft fabric(air-laid paper) to clean the lens if necessary
- Forbid the use of industrial solvents to clean the lens, such as alcohol.
- Optic Lens has the function to change the ray of light; it is made of optical material, and the effect shall be influenced by pollution. Please do not open the packaging before using it to avoid dust pollution.
- Protect the product from the sun and other ultraviolet ray, as the se will lead to aging, change color, crack, etc.
- Please wear gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

## Packing information


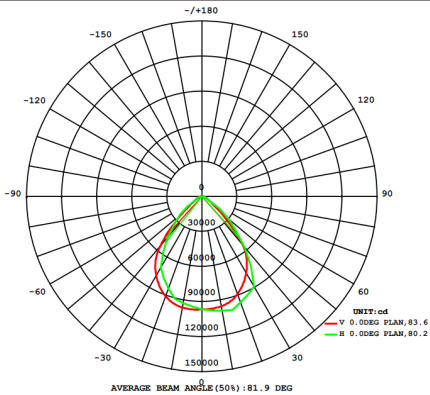
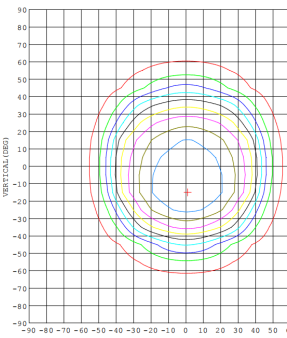
Material	Size	Quantity
BOX	/	/
Carton	320*320*400MM	14PCS

Dimension

- 1、Installation method: Screw
- 2、Lens dimension

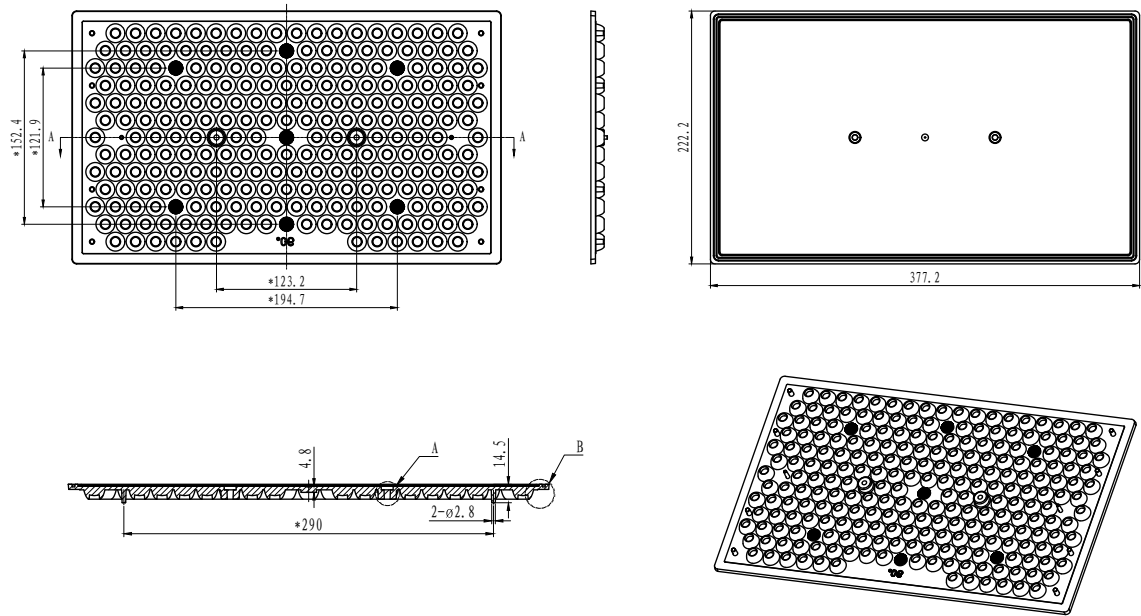

Photometric data (Simulated)

Picture	Item No	Matched LED
	LOUP-5050-90°	5050
	 <p>UNIT:cd V 0.00DEG PLAN,83.6 H 0.00DEG PLAN,80.2 AVERAGE BEAM ANGLE (50%):81.9 DEG</p>	
Photometric data (Simulated)		