


TECHNICAL DATA

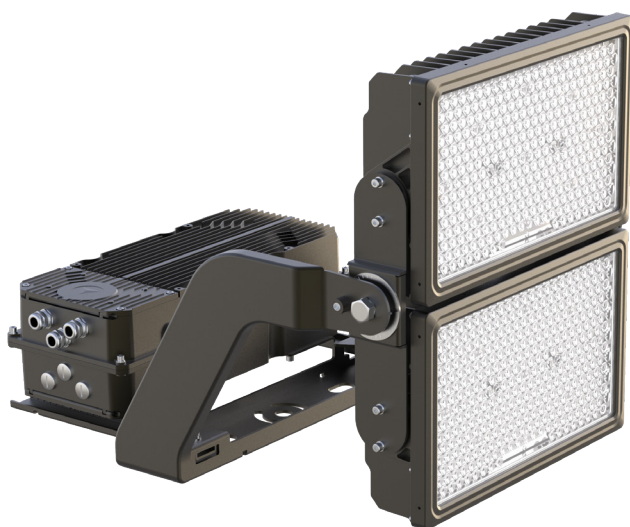

PRO	CRI ≥ 80	
IP67	50000h	90 L°
100-277V 50/60Hz		5 YEARS WARRANTY

TYPE

LOUP floodlight with low wind resistance. Comprehensive range available in Two sizes with extensive optical and light distributions from 1000W up to 12000W to cover all applications. Can be tilted in all directions thanks to its fixing galvanize and painted bracket.

CHARACTERISTICS

LEDs: 5050

Nomial efficacy: 160 lm/W

Maximum LED: 1000mA

Lifetime L90B10: >50,000 hours

Luminous flux and efficacy at 5700°K and CRI>80

Luminous flux tolerance <+/-3%

Values may be subject to change du LED binning.

OPENING/BEAM

High efficiency Ra>80 LED. 90°

MATERIAL

Die-cast aluminium, Transparent 4mm


tempre-d-Glass

Aluminum frame

Steel Galvanized and painted bracket

Model:	Loup
Format:	Rectangular
Location:	Exterior
Wattage:	1000W
Materials:	Aluminium
Led Color:	5700K
Product Dimension:	503*514*621mm
IP Code:	67
Fixation:	Surface
CRI :	80
Lumen Output:	160000LM
Frequency:	50/60 Hz
Beam Angle:	90°
Net Weight:	20.50 Kgs

DIMENSION DRAW

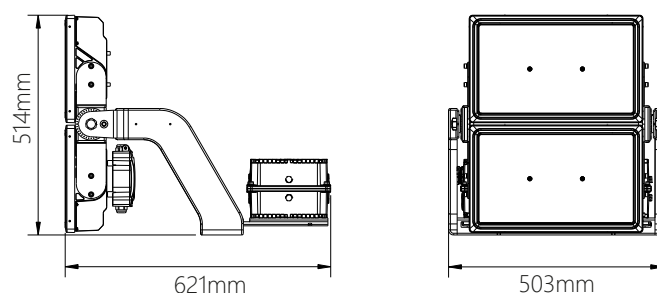

OUTDOOR