



General information

❖ **Features**

- High efficiency
- Uniform light spot
- No-need lens holder
- Cut-off Light Distribution

❖ **Applications**

- Flood light

❖ **Material information**

- Lens material: PC(UV)
- The working temperature is: -40℃ ~ +120℃
- Storage environment temperature is 0℃ ~ 40℃, humidity is 30%~95%

❖ **Application Notes**

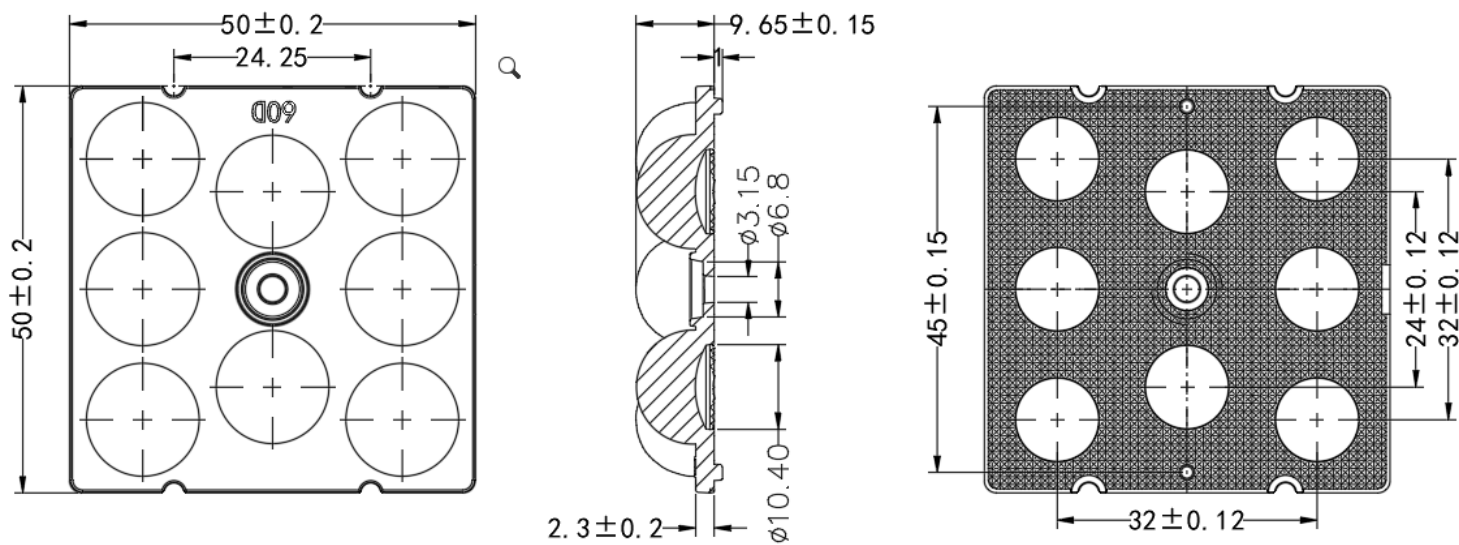
- Please use a litter water and soft fabric(air-laid paper) to clean the lens if necessary
- Forbid the use of industrial solvents to clean the lens, such as alcohol.
- Optic Lens has the function to change the ray of light; it is made of optical material, and the effect shall be influenced by pollution. Please do not open the packaging before using it to avoid dust pollution.
- Protect the product from the sun and other ultraviolet ray, as the se will lead to aging, change color, crack,etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

Packing information


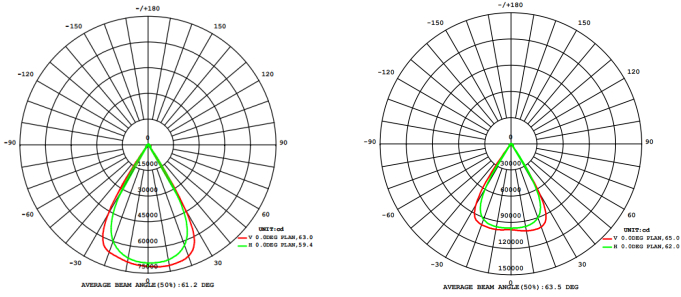

Material	Size	Quantity
BOX	/	/
Carton	390*390*420MM	1296PCS

Dimension

- 1、 Installation method: Screw
- 2、 Lens dimension



Photometric data (Simulated)

Picture	Item No	Matched LED
	CROMO-2835-60°	2835
		
	Photometric data (Simulated)	