



TECHNICAL DATA

TYPE

Professional LED projectors for **Public Lighting**. Can be used in Highway or any public road and in Parks.

CHARACTERISTICS

LEDs: 2835

Nomial efficacy: 170 lm/W

Maximum LED: 1000mA

Lifetime L90B10: >50,000 hours

Luminous flux and efficacy at 5000°K and CRI>80

Luminous flux tolerance <+/-3%

Values may be subject to change du LED binning.

OPENING/BEAM

High efficiency Ra>80 LED. 60°

MATERIAL

Die-cast aluminium, Transparent 4mm

tempred-Glass


Aluminum frame

Steel Galvanized and painted bracket



Model:	Cromo
Format:	Rectangular
Location:	Exterior
Wattage:	600W
Materials:	Aluminium
Led Color:	5000K
Product Dimension:	750*500*400mm
IP Code:	66
Fixation:	Surface
CRI :	80
Lumen Output:	102,000LM
Frequency:	50/60 Hz
Beam Angle:	60°
Net Weight:	13.5Kgs

DIMENSION DRAW

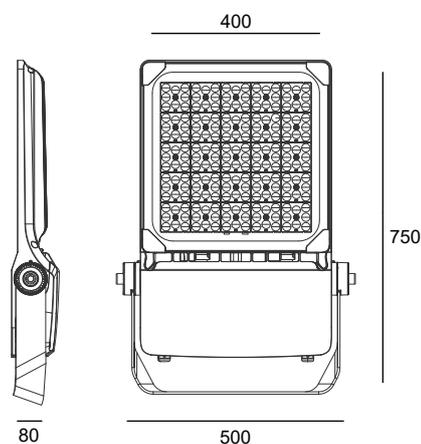

OUTDOOR