


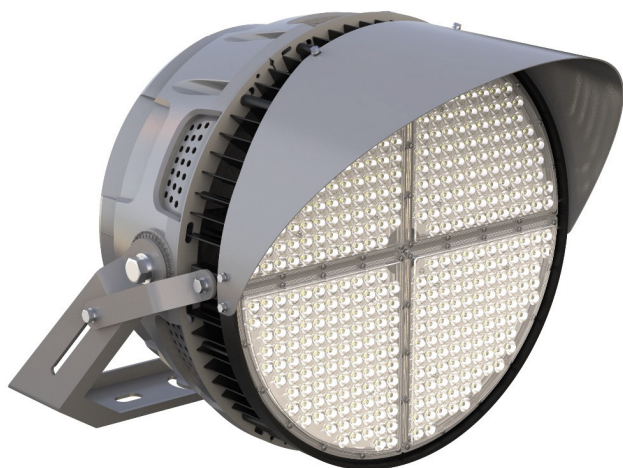

TECHNICAL DATA

TYPE

Professional LED projectors for **Public Lighting**.

Can be used in Highway or any public road and in Parks.

CHARACTERISTICS

LEDs: 5050

Nomial efficacy: 160 lm/W

Maximum LED: 1000mA

Lifetime L90B10: >50,000 hours

Luminous flux and efficacy at 5700°K and CRI>80

Luminous flux tolerance <+/-3%

Values may be subject to change du LED binning.

OPENING/BEAM

High efficiency Ra>80 LED. 20°

MATERIAL

Die-cast aluminium, Transparent 4mm

tempred-Glass


Aluminum frame

Steel Galvanized and painted bracket

PRO	CRI ≥ 80	
IP66	50000h	20°
100-277V 50/60Hz		5 YEARS WARRANTY

Model:	Capo
Format:	Round
Location:	Exterior
Wattage:	1200W
Materials:	Aluminium
Led Color:	5700K
Product Dimension:	615*548*475mm
IP Code:	66
Fixation:	Surface
CRI :	80
Lumen Output:	192000LM
Frequency:	50/60 Hz
Beam Angle:	20°
Net Weight:	27.80 Kgs

DIMENSION DRAW

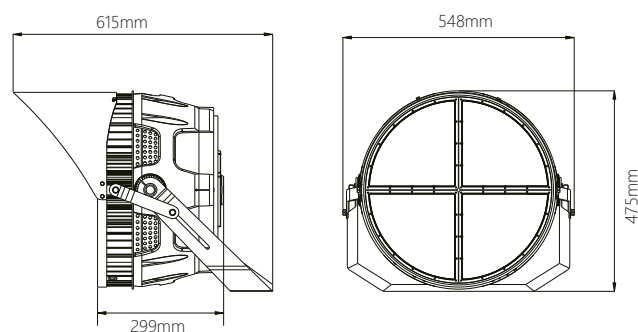

OUTDOOR