



General information

❖ Features

- High efficiency
- Uniform light spot
- No-need lens holder
- Cut-off Light Distribution

❖ Applications

- Indoor warehouse

❖ Material information

- Lens material: PC(UV)
- The working temperature is: -35°C ~ +120°C
- Storage environment temperature is 0°C ~ 40°C, humidity is 30%~95%

❖ Application Notes


- Please use a litter water and soft fabric(air-laid paper) to clean the lens if necessary
- Forbid the use of industrial solvents to clean the lens, such as alcohol.
- Optic Lens has the function to change the ray of light; it is made of optical material, and the effect shall be influenced by pollution. Please do not open the packaging before using it to avoid dust pollution.
- Protect the product from the sun and other ultraviolet ray, as the se will lead to aging, change color, crack,etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

Packing information


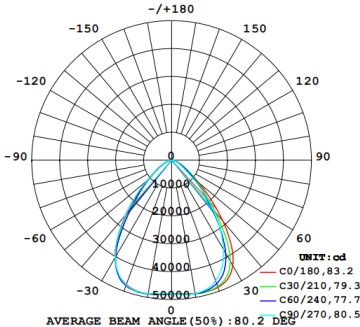
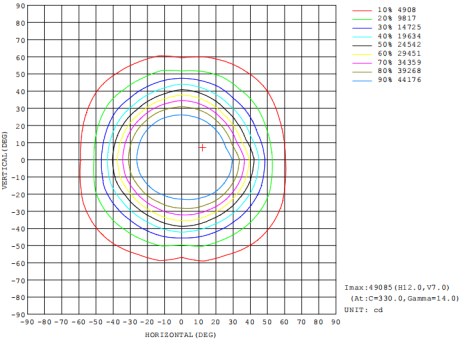
Material	Size	Quantity
BOX	/	/
Carton	380*380*320MM	30PCS

Dimension

- 1、 Installation method: Screw
- 2、 Lens dimension

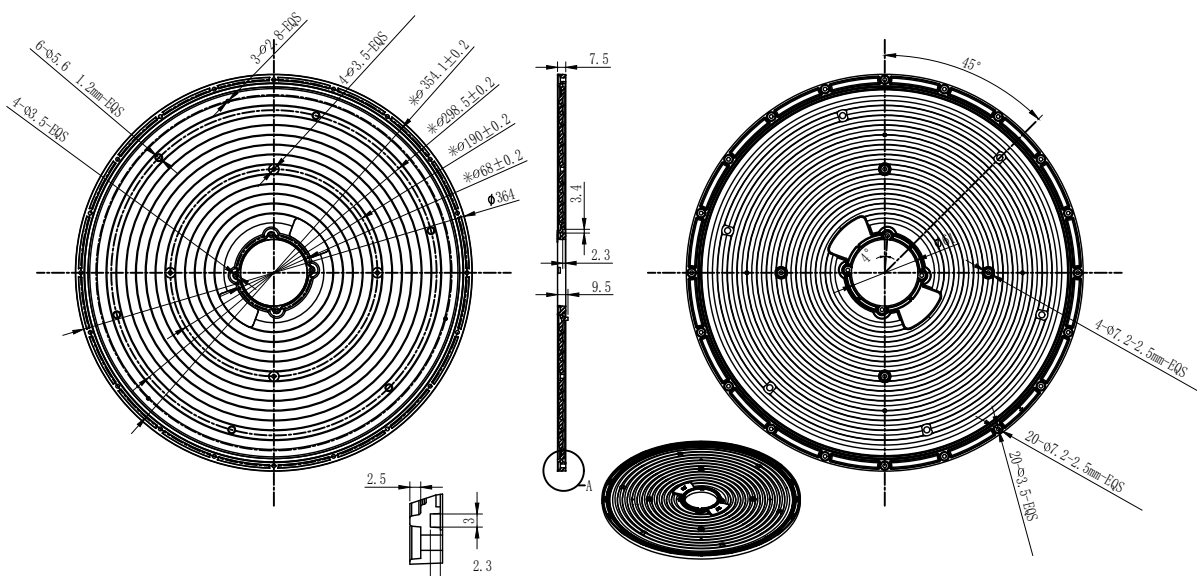

Photometric data (Simulated)

Picture	<div>Item No</div> <div>CROTO-500W-2835</div>	<div>Matched LED</div> <div>2835</div>
	<div> <div>  <p>UNIT: cd C0/180, 83.2 C30/210, 79.3 C60/240, 77.7 C90/270, 80.5 AVERAGE BEAM ANGLE (50%) : 80.2 DEG</p> </div> <div>  <p>Imax: 49085 (812.0, 97.0) (At: C=330.0, Gamma=14.0) UNIT: cd</p> </div> </div> <div>Photometric data (Simulated)</div>	